



ZIGOR PRODUCT CATALOG
2022



always ON



ZIGOR 2022

ZIGOR releases a brand new catalogue in 2022, achieving an important milestone in our commercial offer, as a result of the continuous improvement effort made in recent years in order to update and enlarge our product range.

In this new catalogue **ZIGOR** brings in **functional and innovative updates** in products in which its leadership has been undisputable in recent years: **rectifiers - chargers** for DC power supply of critical systems, **dynamic voltage restorers** for power quality to the industrial sector and hybrid systems for **isolated generation with photovoltaic energy with or without storage**.

Likewise, **ZIGOR** greatly expands the product range in the field of **solar inverters (residential and industrial self-consumption and generation)**, **UPS** (Uninterruptible Power Supply) and **energy storage systems** (ESS) in which **ZIGOR** is now established as clear leader thanks to the flexibility of its solutions and its unique technical features.

ZIGOR remains a benchmark in the provisioning of state-of-the-art **power electronics** equipment. Sustaining the objectives of:

- Facilitate the integration of renewable energies for both self-consumption and large installations.
- Ensure the operation of the electricity grid by improving its regulation and stability.
- Guarantee the electrical supply of critical industrial processes of all those applications that require uninterrupted and quality power supply, maximizing the efficiency of the process.

INDEX

Energy

Advanced Energy Storage: ZGR PCS GRID	6
String Single-phase Inverters: ZGR SOLAR STR 2 / 3 / 4 / 5	8
String Three-phase Inverters: ZGR SOLAR STR 20 / 30 / 40 / 50	10
String Three-phase Inverters: ZGR SOLAR STR 100 / 120 / 200 / 250	12
Central Hybrid Three-phase Inverters: ZGR SOLAR HITC	14
Central Three-phase Inverters: ZGR SOLAR CTR 1250 / 2500	16
Power station: ZGR SOLAR PS 2500 / 6250	18
String Station: ZGR SOLAR STS 2500 / 5000 LV - 3500 MV	20

Transmission and distribution

Compact Switching Charger – Rectifier: ZGR TPS 120	24
Compact Switching Charger – Rectifier – Smart Grid: ZGR TPS 120 / 200 NG	26
Switching Charger – Rectifier: ZGR SWIT NG	28
Modular Switching Charger – Rectifier: ZGR TELSIS APS	30
High Reliability Charger – Rectifier: ZGR MIT NG	34
High Reliability Charger – Rectifier: ZGR MIT	36

Industry


Dynamic Voltage Restorer: ZGR AVC DVR	42
Offline Uninterruptible Power Supply: ZGR DVC SEPEC	46
Active Harmonic Filter: ZGR FAA / AHF	50

UPS

Line-interactive UPS: ZGR QUICK 600 / 800 VA	54
Line-interactive UPS: ZGR OPTIME 600 / 800 VA	56
Line-interactive UPS: ZGR STEADY 1000 / 1500 / 2000 VA	58
Online Single-phase UPS: ZGR TOWER PRO 1 / 3 KVA	60
Online Single-phase UPS: ZGR TOWER PRO 6 / 10 KVA	62
Online Single-phase UPS: ZGR EFFICIENT RT 1 / 3 KVA	64
Online Single-phase UPS: ZGR EFFICIENT R 6 / 10 KVA	66
Online Three-phase UPS: ZGR VERSATILE 10 / 20 KVA	68
Online Three-phase UPS: ZGR VERSATILE RT 10 KVA	70
Online Three-phase UPS: ZGR INFLUENCE 10 / 40 KVA	72
Online Three-phase UPS: ZGR INFLUENCE HP 50 / 180 KVA	74
Online Modular UPS: ZGR SCALABLE 60 / 300 KVA	76
Communication Accessories: UPS	78

Maintenance and Services - ZMS

Maintenance and Services: ZMS	82
--	----



E N E R G Y

In **ZIGOR** we offer **power generation systems and solutions**, optimizing the management of the different energy sources available. The particular needs of the different projects have provided us with information on market concerns, offering customizable solutions for each project and customer, facilitating integration into their facilities, increasing the reliability of the whole system and reducing installation and maintenance costs.

All this has allowed us to provide **grid-tied photovoltaic solar inverters** capable of operating at full power in extreme conditions of temperature and altitude. Moreover, we can design and supply **Central Inverters** (Power Station) **for generation plants optimizing the initial investment or its operating costs and productivity.**

Likewise, **ZIGOR** has a **wide range of solar inverters for residential and industrial self-consumption** applications that enable optimizing the electricity bill by taking advantage of solar radiation both at the time it occurs and at night time using efficient battery storage systems of various technologies.

Our range of solutions for **power generation in remote or disconnected locations** makes possible to tackle with projects from tens of watts to hundreds of kilowatts, managing installation components such as photovoltaic inverters, batteries, generators, etc. and providing high quality and reliable systems. Thanks to our experience we have performed **rural electrification facilities** (domestic and community), power to remote telecommunication nodes, electrification in farms, etc.

ZIGOR has **Innovation** as its hallmark; we are currently participating in storage system projects in support of the distribution grid in Low and Medium Voltage. Our **bi-directional converters** are capable of operating with **traditional** (Lead, Ni-Cd) **and new** (Lithium, Redox, Flywheel) **storage systems**, always from our commitment to the development of new systems that provide advantages to our customers.

ZGR PCS GRID has advanced grid stabilization and regulation functions.

ZGR PCS GRID is a three-phase inverter with the latest bidirectional technology. The objective of the equipment is to convert the energy of the grid into energy in batteries and return it when there is energy demand.


This system facilitates the integration of renewable energies and allows reducing investments in the grid to improve its stability or demand growth.

Thanks to its different operating modes, ZGR PCS GRID offers grid operators and other grid agents an integral tool for a more flexible energy distribution by regulating power, voltage and frequency, guaranteeing the availability of the electrical grid; it also has Black-Start function, increasing the manageability of the energy within the installation. In addition, ZGR PCS GRID inverters can be integrated into a container-type solution providing the necessary flexibility and robustness to power generation systems. This type of integral solutions guarantees the operation and monitoring of the installation at all times, with a considerable reduction of the operation and installation costs.

Container solutions are a perfect solution for large-scale storage projects and are specially designed to meet the most demanding specifications and to operate under adverse environmental conditions.



Skid

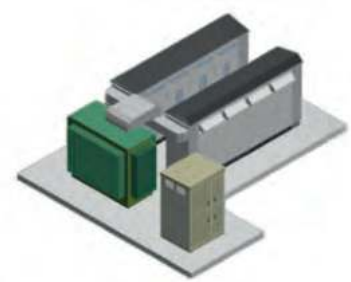

Container




Characteristics

- » Automatic operation modes
 - Frequency control
 - Black-Start (island mode)
 - Active energy reserve
 - Voltage control
 - Active / Reactive power control
- » Low harmonic distortion, HF filter integrated
- » Quick response to set point changes
- » Wide range of working temperatures, from 0 °C to +50 °C
- » Scalable, parallel equipments of 300 kVA
- » AC protections
 - Short-circuits and overcharges
 - Overvoltages and low voltages
- » DC protections
 - Overvoltage
- » AC and DC isolator integrated
- » Galvanic isolation*
- » Local monitoring via LCD screen
- » Remote monitoring via Web Server
- » Supports various communications standards: SNMP, TPC/IP
- » Other communication standard on demand: IEC 104, etc.

* External

Communication gateway integrated. It enables the communication via Web Server (http). The Web Server provides full access to all information of ZGR PCS GRID: voltage and current measures, alarms, configuration, etc.

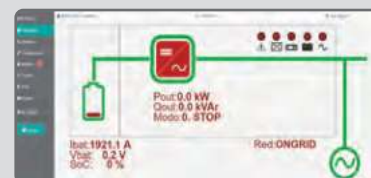

TECHNICAL SPECIFICATIONS		
Model	ZGR PCS GRID 150	ZGR PCS GRID 300
ELECTRICAL CHARACTERISTICS		
AC nominal voltage	150 kVA	300 kVA
AC nominal voltage	3 x 400 V	
Nominal frequency	50 / 60 Hz	
Power factor	1 adjustable ± 0.8 (without exceeding the apparent power of the inverter)	
Phase nominal current	217 A	435 A
AC current distortion	< 3 % THD at nominal power ⁽¹⁾	
Battery voltage	600 – 850 Vdc ⁽²⁾	
DC maximum current	257 A	515 A
Peak efficiency	97 %	
Battery charging current limitation	Configurable	
COMMUNICATIONS		
Monitoring	Web interface, LCD control panel, LED signalling	
Communications	SNMP, Ethernet	
MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS		
Protections	AC surge, AC low voltage, oven and under frequency, DC surge	
Cooling	Forced ventilation	
Range ambient temperature	- 10 °C to + 50 °C	
Degree of environmental protection	IP 21	
Operating altitude	< 1000 m without power loss	
Relative humidity	0 a 95 % without condensation	
Dimensions (HxWxD)	800 x 2150 x 600 mm	
Approx. Weight	360 kg	450 kg
STANDARDS		
Marks	CE ⁽³⁾	
General directives	IEC 62909-1, IEC 62477-1+AMD1, CISPR-11, CISPR-11. UNE 217002. UNE 206007-1 IN	


⁽¹⁾ For THDV < 1% and nominal power

⁽²⁾ The voltage of the battery must not exceed this value in any case

⁽³⁾ With isolation transformer and external filter

To customize the equipment consult ZIGOR
These specifications may change without notice

Use case

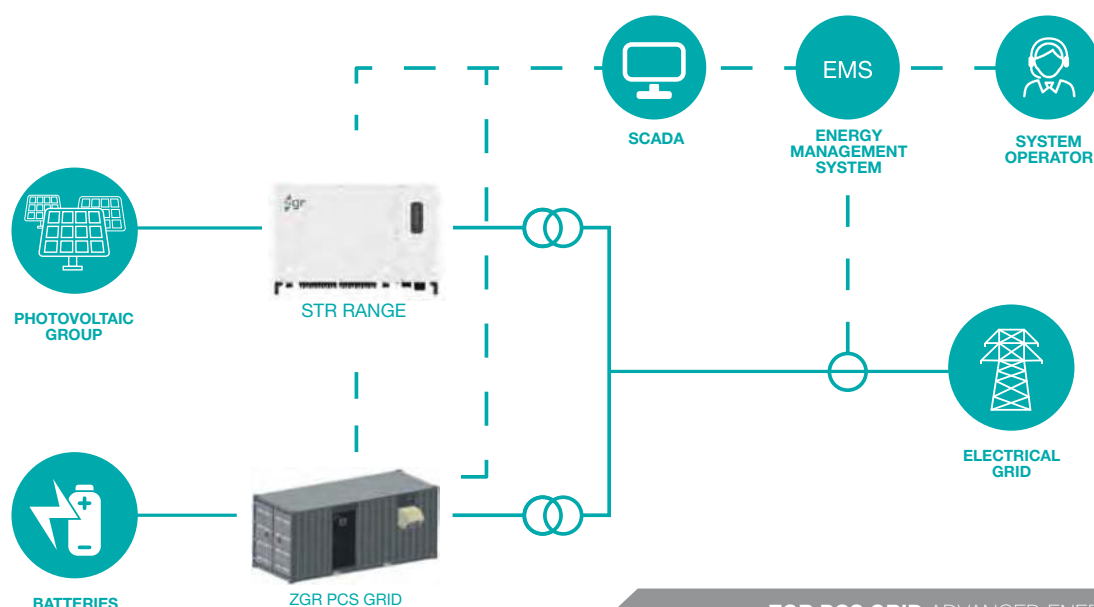

ZGR PCS GRID ADVANCED ENERGY STORAGE

ZGR SOLAR STR 2 / 3 / 4 / 5

STRING SINGLE-PHASE INVERTERS



ZGR STR 2 / 3 / 4 / 5

inverters offer high energy efficiency with compact and lightweight design, being ideal for residential integrations.

ZGR SOLAR STR string inverters are easy-to-use devices that have been designed to meet the needs of residential grid connection.

In an effort to improve the functionalities of domestic photovoltaic installations, these inverters offer efficiency greater than 97% as well as local and remote monitoring functionalities.

This new range of string inverters offers a power range between 2 and 5 kW, with a noise level below 35dB, not affecting the comfort of the household.



Applications



DOMESTIC
USE



PHOTOVOLTAIC



ENERGY
SAVINGS



SELF-
CONSUMPTION

Characteristics

- » Maximum Power Point Tracking (MPPT)
- » Efficiency greater than 97%
- » Reduced harmonic distortion <3%
- » Suitable for integration into self-consumption facilities
- » Local monitoring via LCD
- » Easy installation (Plug & Play)
- » Compact and lightweight design
- » Reduced noise level
- » Cooling by natural ventilation

ZGR SOLAR STR 2 / 3 / 4 / 5 STRING SINGLE-PHASE INVERTERS

TECHNICAL SPECIFICATIONS				
Model	ZGR SOLAR STR 2	ZGR SOLAR STR 3	ZGR SOLAR STR 4	ZGR SOLAR STR 5
INPUT [DC]				
Max. PV voltage	500 V			
MPP voltage range	100 - 490 V			
MPP voltage range for nominal power	190 – 400 Vdc	240 - 400 Vdc	165 – 400 Vdc	240 - 400 Vdc
Nominal PV input voltage	380V			
Min. PV input voltage	100V			
No. of MPPT trackers	1		2	
Max. Number of input connector per MPPT	1			
Max. Current per MPPT	11 A	13 A	13 A	
Max. Short-circuit current per MPPT	15 A	17 A	17 A	
Max. Current DC	11 A	13 A	26 A	
OUTPUT [AC]				
Nominal AC output power	2 kW @30°C; 1,8 kW @40°C; 1,6 kW @50°C	3 kW @30°C; 2,7 kW @40°C; 2,4 kW @50°C	4 kW @30°C;3,6 kW @40°C; 3,2 kW @50°C	3 kW @30°C; 4,5 kW @40°C; 4 kW @50°C
Max. AC apparent power	2 kVA	3 kVA	4 kVA	5 kVA
Max. AC Active Power (cosφ=1)	2 kW	3 kW	4 kW	5 kW
Nominal AC voltage	230 V ± 20%			
AC connection	1W + N + PE			
AC grid frequency range	50 / 60 Hz (± 5 Hz)			
Nominal output current	9 A	13 A	17,5 A	22 A
Max. output current	9 A	13 A	17,5 A	22 A
Adjustable power factor range	0,9 lagging/leading			
THDi	<3%			
EFFICIENCY				
Max. Efficiency	97,6 %		97,5 %	
European Efficiency	97 %		97 %	
PROTECTIONS				
Protections	DC switch; Anti-islanding Protection; DC Reverse-polarity Protection; PV-array String Fault Monitoring; Overvoltage protection; Ground fault monitoring; AC Overcurrent Protection; AC short circuit protection			
GENERAL CHARACTERISTICS				
Topology	Transformerless			
Cooling Method	Natural cooling			
Operating Temperature Range	-25°C - 60°C			
Protection class	IP 65			
Ingress protection rating	Clase I			
Noise emission	<25 dB		<35 dB	
Operating Altitude	< 2.000m			
Relative Humidity	0 a 95 % non-condensing			
Dimensions (W x H x D)	264 x 326 x 127 mm		329 x 466 x 149 mm	
Weight	8,1 kg	8,6 kg	14,9 kg	15,5 kg
COMMUNICATION				
Communications	RS 485			
COMPLIANCE				
Certification & Standards	EN 62109-1: 2011 & EN 62109-2:2013 ; IEC 61000-3-2 ; EN 61000-6-2 & EN 61000-6-3 ; VDE 0126-1-1 ; RD 244/2019 & UNE 217001:2020; EN206007 & UNE 217002:2020; Rule UE 2016/631:NTS 631 v2		EN 62109-1: 2011 & EN 62109-2:2013; EN 61000-3-12:2012 ; EN 61000-6-2 & EN 61000-6-3; VDE 0126-1-1 ; RD 244/2019 & UNE 217001:2020; EN206007 & UNE 217002:2020; Rule UE 2016/631: NTS 631 v2	


These specifications may change without notice

Connections


ZGR SOLAR STR 4/5



ZGR SOLAR STR 2/3



ZGR SOLAR STR 4/5

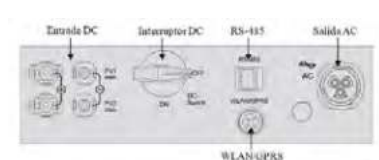

ZGR SOLAR STR 20 / 30 / 40 / 50

THREE-PHASE STRING INVERTERS



ZGR STR 20 / 30 / 40 / 50

solar inverters offer high energy efficiency with a compact and lightweight design.

String inverters ZGR SOLAR STR are easy-to-use devices that have been designed to meet the needs of all solar power plants connected to the grid.

In an effort to improve the performance of solar plants, these inverters offer high energy efficiency, greater than 98%.

ZGR SOLAR STR inverters have an LCD display, to make it easier for the user to access the information of the inverter and its parameters.

This new range of string inverters offers a DC input voltage range between 480 to 800 Vdc and an IP 65 tightness rating.



Applications



INDUSTRY



PHOTOVOLTAIC



SELF-
CONSUMPTION

Characteristics


- » Maximum Power Point Tracking (MPPT)
- » High efficiency, greater than 98%
- » Reduced harmonic distortion, THD <3%
- » Direct grid connection
- » Parallel connection without limitation
- » Anti-island protection with automatic disconnection
- » Local monitoring via LCD
- » Protection against
 - Reverse - polarity
 - Short-circuits
 - Overvoltages
 - Isolation faults
- » Compact and lightweight design, easy installation

ZGR SOLAR STR 20 / 40 / 50 THREE-PHASE STRING INVERTERS

TECHNICAL SPECIFICATIONS				
Model	ZGR SOLAR STR 20	ZGR SOLAR STR 30	ZGR SOLAR STR 40	ZGR SOLAR STR 50
INPUT [DC]				
Max. PV voltage	1000 V			
MPP voltage range	250 - 950 V			
MPP voltage range for nominal power	480 - 800 V			
Nominal PV input voltage	620 V			
Min. PV input voltage	250 V			
No. of MPPT trackers	2	3		
Max. Number of input connector per MPPT	2	4		
Max. Current per MPPT	21 A	36 A		
Max. Short-circuit current per MPPT	28 A	48 A		
Max. Current DC	42 A	108 A		
OUTPUT [AC]				
Nominal AC output power	22 kW @30°C; 20 kW @40°C; 18 kW @50°C	33 kW @30°C; 30 kW @40°C; 30 kW @50°C	44 kW @30°C; 40 kW @40°C; 40 kW @50°C	55 kW @30°C; 50 kW @40°C; 45 kW @50°C
Max. AC apparent power	22 kVA	33 kVA	44 kVA	55 kVA
Max. AC Active Power (cosφ=1)	22 kW	33 kW	44 kW	55 kW
Nominal AC voltage	400 V ± 20%			
AC connection	3W + N + PE			
AC grid frequency range	50 / 60 Hz (± 5 Hz)			
Nominal output current	29 A	43 A	58 A	72 A
Max. output current	32 A	48 A	64 A	80 A
Adjustable power factor range	0,8 lagging/leading			
THDi	<3%			
EFFICIENCY				
Eficiencia máxima	98 %	98,6 %		
Eficiencia europea	97,5 %	98 %		
PROTECTIONS				
Protecciones	DC switch; Anti-islanding Protection; DC Reverse-polarity Protection; PV-array String Fault Monitoring; Overvoltage protection; Ground fault monitoring; AC Overcurrent Protection; AC short circuit protection			
GENERAL CHARACTERISTICS				
Topology	Transformerless			
Cooling Method	Natural cooling	Smart forced air cooling		
Operating Temperature Range	-25°C - 60°C			
Protection class	IP 65			
Ingress protection rating	Clase I			
Noise emission	<40 dB	<60 dB		
Operating Altitude	< 3000 m			
Relative Humidity	0 a 95 % non-condensing			
Dimensions (W x H x D)	715 x 553 x 228 mm	958 x 636 x 260 mm		
Weight	39 kg	68 kg		
COMMUNICATION				
Communications	RS485			
COMPLIANCE				
Certification & Standards	EN 62109-1: 2011 & EN 62109-2:2013 ; EN 61000-3-12:2012 ; EN 61000-6-2 & EN 61000-6-4 ; VDE 0126-1-1 ; RD 244/2019 & UNE 217001:2020 ; EN206007 & UNE 217002:2020 ; UE 2016/631:NTS 631 v2			

These specifications may change without notice

Connections

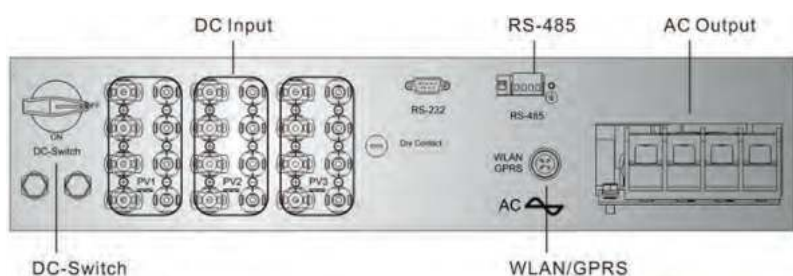

ZGR SOLAR STR 100 / 120 / 200 / 250

THREE-PHASE STRING INVERTER




The **ZGR SOLAR STR 100 / 120 / 200 / 250** solar inverters offer high energy efficiency with a compact design, being ideal for medium to large sized solar plants.

ZGR SOLAR STR 100 / 120 / 200 / 250 string inverters are user-friendly devices designed to meet the needs of all grid-connected solar power plants.

In an effort to improve the performance of solar plants, these inverters offer a high energy efficiency, greater than 98%. The ZGR SOLAR STR 100 / 120 / 200 / 250 inverters have LED indicator, to facilitate the user's inverter management.

This new range of string inverters offers an input DC voltage range, at full load, between 880 and 1300 Vdc and an IP 66 protection degree.

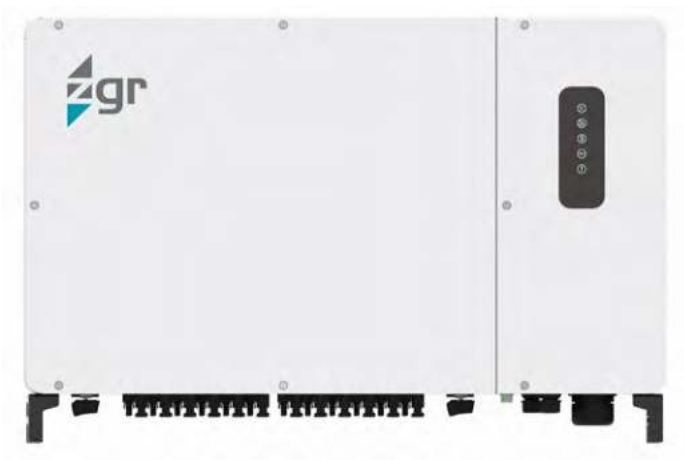

Applications



PV ON-GRID



PV MEDIUM VOLTAGE



ENERGY SAVINGS

Characteristics


- » Maximum Power Point Tracking (MPPT)
- » High efficiency, greater than 98%
- » Reduced harmonic distortion, THD <3%
- » Direct connection to step-up transformer
- » Parallel connection without limitation
- » Anti-island protection with automatic disconnection
- » Local monitoring via LED indicators
- » Protection against
 - Reverse - polarity
 - Short-circuits
 - Overvoltages
 - Isolation faults
- » Compact design and easy installation

ZGR SOLAR STR 120 / 200 / 250 THREE-PHASE STRING INVERTER

TECHNICAL SPECIFICATIONS				
Model	ZGR SOLAR STR 100	ZGR SOLAR STR 120	ZGR SOLAR STR 200	ZGR SOLAR STR 250
INPUT [DC]				
Max. PV voltage	1100 V		1500 V	
MPP voltage range	200 – 1000 V		600 - 1500 Vdc	
MPP voltage range for nominal power	550 - 850 V		880 - 1300 Vdc	
Nominal PV input voltage	620 V		1080 V	
Min. PV input voltage	200 V		650 V	
No. of MPPT trackers	10		12	
Max. Number of input connector per MPPT	2		2	
Max. Current per MPPT	26 A		30 A	
Max. Short-circuit current per MPPT	35 A		40 A	
Max. Current DC	260 A		360 A	
OUTPUT [AC]				
Nominal AC output power	100 kW @30 °C; 100 kW @40 °C; 100 kW @50 °C	120 kW @30 °C; 110 kW @40 °C; 100 kW @50 °C	200 kW @40 °C; 175 kW @50 °C	250 kW @40°C;225 kW @50°C
Max. AC apparent power	100 kVA	120 kVA	200 kVA	250 kVA
Max. AC Active Power (cos φ=1)	100 kW	120 kW	200 kW	250 kW
Nominal AC voltage	400 V ± 20%		800 V ± 20%	
AC connection	3W + N + PE			
AC grid frequency range	50 / 60 Hz (± 5 Hz)			
Nominal output current	144 A	173,9 A	126,3 A	162,4 A
Max. output current	147 A	176,4 A	144,3 A	180,4 A
Adjustable power factor range	0,8 lagging/leading			
THDi	< 3%	< 3%	< 3%	< 3%
EFFICIENCY				
Max. Efficiency	99 %	99 %	99 %	99 %
European Efficiency	98,6 %	98,6 %	98,5 %	98,6 %
PROTECTIONS				
Protections	DC switch; Anti-islanding Protection; DC Reverse-polarity Protection; PV-array String Fault Monitoring; Overvoltage protection; Ground fault monitoring; AC Overcurrent Protection; AC short circuit protection; LVRT / HVRT			
GENERAL CHARACTERISTICS				
Topology	Transformerless			
Input terminal	Amphenol			
Cooling Method	Smart forced air cooling			
Operating Temperature Range	-25 °C - 60 °C			
Protection class	IP66			
Ingress protection rating	Class I			
Noise emission	≤ 65 dB			
Operating Altitude	< 4000 m			
Degree of pollution	PD3			
Relative Humidity	0-100% non-condensing			
Dimensions (W x H x D)	1055 x 700 x 336 mm			
Weight	96 kg		110 kg	
COMMUNICATION				
Communication	RS485			
COMPLIANCE				
Certification & Standards	EN 62109-1: 2011 & EN 62109-2:2013 ; EN 61000-6-2 & EN 61000-6-4 ; VDE 0126-1-1; RD 244/2019 & UNE 217001:2020 ; EN206007 & UNE 217002:2020 ; UE 2016/631:NTS 631 v2			

These specifications may change without notice

Connections

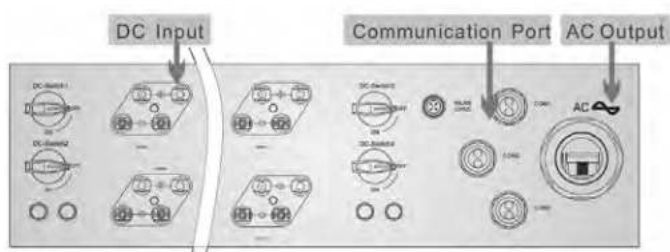

ZGR SOLAR HITC

CENTRAL HYBRID THREE-PHASE INVERTERS



ZGR SOLAR HITC

solar inverters are the ideal solution for off-grid applications.

The range of ZGR SOLAR HITC hybrid solar inverters are designed to meet the energy needs where the power grid does not reach, for rural electrification and/or electrification of remote areas.

The main characteristic of ZGR SOLAR HITC hybrid inverters is that it is able to generate electricity from different resources: photovoltaic, batteries, grid or generator set.

The three-phase hybrid inverters of ZGR SOLAR HITC can aggregate energies from different sources and simultaneously control all energy contributions from a single system.



Applications



ISOLATED GRIDS

Characteristics

- » Wide range of input voltage (350-700 Vdc) for solar panels
- » Very low harmonic distortion, THD < 3%
- » Grid input or Generator set
- » Photovoltaic field input through internal charger
- » Back up battery
- » Degree of environmental protection IP21
- » Galvanic isolation through transformer
- » Protection against
 - Reverse - polarity
 - Short-circuits
 - Overvoltages
 - Isolation faults
- » Local monitoring via LCD
- » Remote monitoring via Web Server

Connectivity and Monitoring

INTEGRATED WEB SERVER

Communication gateway integrated. It enables the communication via Web Server (http). The Web Server provides full access to all information of ZGR SOLAR HITC: voltage and current measures, alarms, configuration, etc.

ZGR SOLAR HITC CENTRAL HYBRID THREE-PHASE INVERTERS

TECHNICAL SPECIFICATIONS			
Modelo	ZGR HITC 100	ZGR HITC 100+	ZGR HITC 150
AC OUTPUT ELECTRICAL CHARACTERISTICS			
Nominal active power	100 kW	100 kW	150 kW
Output nominal voltage	208 / 220 / 240 ó 380 / 400 / 440 Vac (3F + N)		380 / 400 / 440 V
Frequency range	50 – 60 Hz		
Maximum current per phase	278 / 152 A	278 A / 152 A	228 A
AC surge protection	Yes		
Short-circuit protection	Yes		
FV INPUT ELECTRICAL CHARACTERISTICS			
FV field recommended power	105 kWp	105 kWp	157 kWp
Maximum input current	250 A	250 A	375 A
Input numbers	1		
FV voltage range	350~700Vdc		
FV optimum generation voltage range	420~470 Vdc		
DC open circuit maximum voltage	880Vdc ⁽¹⁾		
DC overvoltage protection	Yes		
Reverse – polarity connection protection	Yes		
GENERATOR SET INPUT ELECTRICAL CHARACTERISTICS			
Nominal power	≥ 180 kVA	≥ 280 kVA	≥ 340 kVA
Input nominal voltage	208 / 220 / 240 ó 380 / 400 / 440 Vac (3F + N)		
Frequency range	50 / 60 ± 5 Hz		
Maximum current per phase	389 A / 213 A	595 / 345 A	725 A / 420 A
Set start control	Dry contact (230 Vac / 4 A max.)		
Short-circuit protection	Yes		
BATTERY			
Nominal voltage	340Vdc		
Voltage range	300~420 Vdc		
Charge maximum current	100 A	300 A	300 A
Discharge maximum current	350 A	350 A	510 A
Short-circuit protection	Yes		
Reverse – polarity connection protection	Yes		
Over-discharge protection	Yes		
Charge management	Yes		
OTHERS			
Efficiency	>96 % transformer included. Between renovable resource and AC output		
Control panel	2 lines display, keyboard and 3 signalling LEDs		
Monitoring	Auto checking / Data and events log / Web interface		
Communications	Ethernet – Web Server, SNMP		
AC and DC isolators	Integrated into the system		
Isolation transformer	Integrated into the system		
Cooling	Forced ventilation		
Range ambient temperature	-10~50 °C		
Degree of environmental protection	IP21		
Operating altitude	< 1000 m without power loss		
Relative humidity	0 ~ 95% without condensation		
Dimensions (mm)	2150 x 1600 x 630	2150 x 2400 x 630	
Approx. Weight	1320 kg	1420 kg	1480 kg
COMPLIANCE			
Marks	CE		
General directives	2006/95/CEE-93/68/CEE, 2004/108/CEE		
Regulations	IEC 62909-1, IEC 62109-1, IEC 62109-2, IEC 61000-6-4, IEC 61000-6-2, UNE 217002, UNE 206007-1 IN		

(1) This voltage must not be exceeded in any case
To customize the equipment consult ZIGOR
These specifications may change without notice

ZGR SOLAR CTR 1250 / 1500

CENTRAL THREE-PHASE INVERTERS



always ON

ZGR SOLAR CTR 1250 / 1500 inverters provide high performance with reduced dimensions.

ZGR SOLAR CTR 1250 / 1500 inverters have been specially designed to improve performance and reduce volume in medium-large solar plants. Three-phase ZGR SOLAR CTR inverters from 1250 to 1500 kW stand out for their high efficiency.

Likewise, the range of ZGR SOLAR CTR 1250 / 1500 inverters offer high reliability and guarantee of operation. It should be noted that with these inverters an unbeatable power density per unit of volume has been achieved, making possible a significant reduction in the space required for medium-large solar plant investors.

Another important feature is its automatic reactive regulation and its communication capabilities between them and the centralized supervision and control system. All its parameters are configurable locally and also remotely. ZGR SOLAR CTR 1250 / 1500 inverters are adapted to several regulations to meet the requirements for response to voltage dips without disconnection.

Moreover, container solutions are a perfect for medium-large-scale projects and are specially designed to meet the most demanding specifications and to operate under adverse environmental conditions.



Container



Applications



PV ON-GRID



PV MEDIUM VOLTAGE



ENERGY SAVING

Characteristics

- » Input voltage range (800-1300 Vdc)
- » Maximum Power Point Tracking (MPPT)
- » High energy efficiency MPPT > 99%
- » Very low harmonic distortion, THD < 3%
- » Selectable power factor
- » Anti-island protection with automatic disconnection
- » Equipment monitoring by graphic display
- » Degree of environmental protection IP21 (in container IP 54)
- » Easy maintenance
- » Protection against
 - Reverse - polarity
 - Short-circuits
 - Overvoltages
 - Isolation faults with relay output

ZGR SOLAR CTR 1250 - 1500 CENTRAL THREE-PHASE INVERTERS

TECHNICAL SPECIFICATIONS		
Model	ZGR SOLAR CTR 1250	ZGR SOLAR CTR 1500
INPUT [DC]		
Max. PV voltage	1500 V	
MPP voltage range	800 – 1300 V	900 - 1300 V
No. of MPPT trackers	1	1
Inputs DC	10	12
Max. Total current DC	1750 A	1870 A
Max. Current per input connector	175 A	156 A
OUTPUT [AC]		
Nominal AC output power	1375 kW @50 °C; 1250 kW @55 °C	1500 kW @50 °C; 1375 kW @55 °C
Max. AC apparent power	1375 kVA	1500 kVA
Max. AC Active Power (cosφ=1)	1250 kW	1500 kW
Nominal AC voltage	550 V	600 V
Voltage range AC	(1±10%)×Nominal Voltage AC (adjustable ±5%,±10%,±15%)	
AC connection	3W + N + PE	
AC grid frequency range	50 / 60 Hz (± 5 Hz)	
Nominal output current	1312 A	1443 A
Max. output current	1443 A	1443 A
Adjustable power factor range	0,9 lagging/leading	
THDi	< 3%	< 3%
EFFICIENCY		
Max. Efficiency	99 %	
European Efficiency	98,7 %	
PROTECTIONS		
DC switch	DC switch; Anti-islanding Protection; DC Reverse-polarity Protection; PV-array String Fault Monitoring; Overvoltage protection; Ground fault monitoring; AC Overcurrent Protection; AC short circuit protection; LVRT / HVRT; Disconnecter AC/DC; Over/Sub Frequency; Supervision of self-diagnostic equipment	
GENERAL CHARACTERISTICS		
Cooling Method	Smart forced air cooling	
Operating Temperature Range	-10 °C - 60 °C	
Protection class	IP21 (into container IP54)	
Noise emission	≤ 65 dB	
Operating Altitude	< 3000 m	
Relative Humidity	0-95%non-condensing	
Dimensions (W x H x D)	1600 x 750 x 2100 mm (container option 2991 x 2438 x 2591 mm)	
Weight	1600 kg	
COMMUNICATION		
Communication	RS485	
COMPLIANCE		
Certification & Standards	EN 62109-1: 2010 & EN 62109-2:2011 ; EN 61727: 2004; IEC 62116: 2014; EN 61000-6-2 & EN 61000-6-4; UE 2016/631:NTS 631 v2	


These specifications may change without notice

Dimensions

Indoor



Outdoor

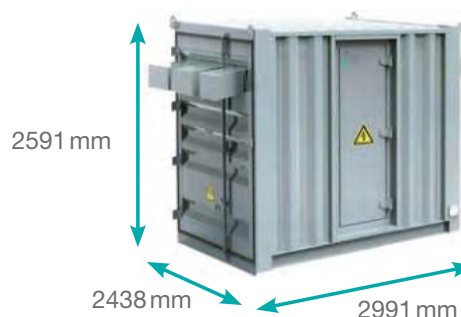

ZGR SOLAR PS

POWER STATION 2500 / 6250

ZGR SOLAR PS is the ideal turnkey solution for large photovoltaic plants.

ZGR SOLAR PS is a plug and play solution in a metal container, fully equipped with inverters connected to a transformation centre and medium-voltage switchgear, in addition to auxiliary services and communications for use in photovoltaic plants.

It is a turnkey solution that allows increasing the overall efficiency of a conversion system and reducing installation costs.

All the electronic equipments that compose system are adapted according to the technical specifications required and combined to reach maximum performance, efficiency and uninterrupted operation throughout its useful life

ZGR SOLAR PS 2500



ZGR SOLAR PS 6250



Applications



PV ON-GRID



PV MEDIUM
VOLTAGE



ENERGY
SAVING

Characteristics

- » Wide range of input voltage
- » Up to 60 DC inputs
- » Active and reactive power control
- » LVRT / HVRT / FRT functions
- » Standard container of 20/40 feet
- » Easy installation (Plug & Play)
- » Medium voltage transformer
- » Multiple protections
- » Modular interior design for easy maintenance

TECHNICAL SPECIFICATIONS		
Model	ZGR SOLAR PS 2500	ZGR SOLAR PS 6250
Power	2500 kW	6250 kW
INPUT ELECTRICAL CHARACTERISTICS		
Voltage range	1500 Vdc	
Maximum Power Point Tracking range (MTTP)	800 – 1300 Vdc	900 – 1300 V
Number of Inputs	20 – 24	60
MTTP number	2	4
Maximum DC input current	3500 A	8160 A
OUTPUT ELECTRICAL CHARACTERISTICS		
Output nominal power	2500 kW/kVA	6250 kW/kVA
Output maximum power	2750 kW	7200 kW
LV output nominal voltage	550 V 630 V	630 kV
MV output nominal voltage	10-35 kV	10-35 kV
Frequency range	50 / 60 Hz (± 4,5 Hz) (adjustable)	50 / 60 Hz (± 5 Hz) (adjustable)
Power factor	1 (± 0,9) (adjustable)	1 (± 0,8) (adjustable)
THDi	< 3 %	
PROTECTIONS		
AC leakage current fault	Yes	
Ground fault detection	Yes	
LVRT	Yes	
Anti-islanding	Yes	
DC reverse – polarity	Yes	
AC surge	Yes	
DC overvoltage	Yes	
GENERAL CHARACTERISTICS		
Maximum efficiency	99 %	
European efficiency	98,7 %	
MPPT efficiency	> 99 %	
Cooling	Forced ventilation	
Communications	RS 485, Ethernet (optional)	
MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS		
Range ambient temperature	-40 °C to +60 °C (derating from 50 °C)	
Degree of environmental protection	IP54	
Operating altitude	2000 m	
Relative humidity	0 to 95 % without condensation	
Noise level	< 65 dB	< 60 dB
Dimensions	6058 x 2438 x 2896 mm (20 feet)	12192 x 2438 x 2896 mm (40 feet)

These specifications may change without notice

Dimensions

ZGR SOLAR PS 2500



ZGR SOLAR PS 6250



ZGR SOLAR STS 2500 / 3500 / 5000

STRING STATION – 2500 / 5000 LV
– 3500 MV




ZGR SOLAR STS

is the ideal turnkey solution for large photovoltaic plants.

The ZGR SOLAR STS is a Plug&Play solution in Skid, fully equipped with inverters, optionally connected to a transformer station and medium voltage cells, as well as auxiliary services and communications for use in photovoltaic installations.

It is a turnkey solution that makes possible to increase the overall efficiency of a conversion system and reduce installation costs.

All the electronic equipment are adapted according to the technical needs required by the installation and are combined to achieve maximum performance, efficiency and uninterrupted operation throughout its service life.

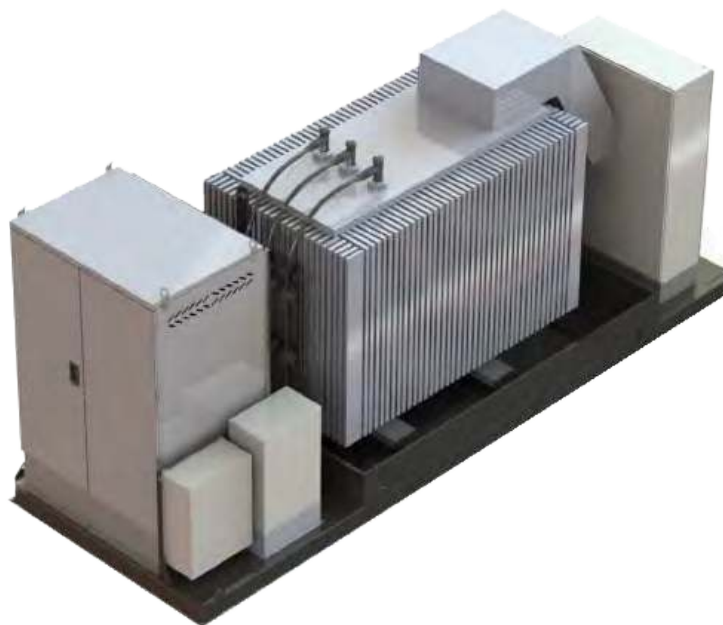

Applications



PV ON-GRID



PV MEDIUM VOLTAGE



ENERGY SAVINGS

Characteristics

- » Wide range of input voltage
- » Modular – Standard String inverters
- » Active and reactive power control
- » LVRT / HVTR / FRT functions
- » Transportable skid in standard container
- » Easy installation (Plug & Play)
- » Medium voltage transformer*
- » Multiple protections
- » Modular outdoor design for easy maintenance
- » Customized designs according to project needs


* Optional

ZGR SOLAR STS STRING STATION 2000 / 4000 LV - 2500 MV

TECHNICAL SPECIFICATIONS			
Model	ZGR SOLAR STS 2500	ZGR SOLAR STS 3500	ZGR SOLAR STS 5000
TRANSFORMER			
Nominal AC output power	2500 kVA @40°C	3500 kVA @40°C	5000 kVA @40°C
Max. AC output power	2700 kVA @30°C	3800 kVA @30°C	5500 kVA @30°C
Transformer vector	Dyn11	Dyn11	Dyn11yn11
LV / MV voltage	0,8 kV/ 20 - 36 kV		
Nominal current input	1620 A	2268 A	2x1620 A
Frequency	50 Hz / 60 Hz		
Regulation MT	±2,5 ±5%		
Cooling Method	ONAN		
Oil type	Mineral		
MEDIUM VOLTAGE SWITCHGEAR			
Configuration	2L1P		
Isolation	SF6/Vacuum		
Voltage range	20 kV - 36 kV		
Nominal current	630 A		
Short-circuit current	20kA (1sec)		
PROTECTIONS			
Transformer protection	DGPT2		
Input protection AC	Load-interrupter switch (3 poles)		
Protection relay	IKI 30/35		
LOW VOLTAGE SWITCHGEAR			
Protection	250 A / 800 Vac / 3 Poles, 10 uds	250 A / 800 Vac / 3 Poles, 14 uds	250 A / 800 Vac / 3 Poles, 2x10 uds
GENERAL CHARACTERISTICS			
Operating Temperature Range	-20 - 50°C		
Auxiliary power	10 kVA / 400 V		
Protection class	IP54		
Relative Humidity	0-95% non-condensing		
Communication	RS485/Ethernet		

These specifications may change without notice

Topology

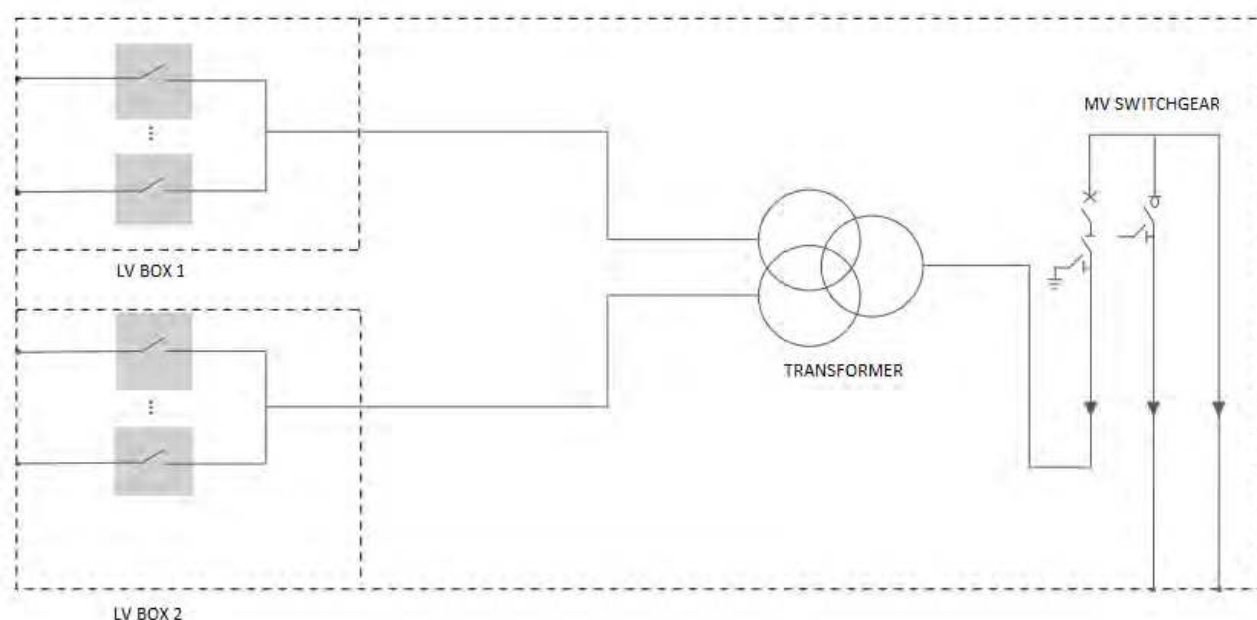



TRANSMISSION AND DISTRIBUTION

The continuous increase of the needs optimal quality **electrical energy supply** for highly sensitive consumption, which is fed by a progressively more complex mix of generation sources, constitutes a challenge in which the digitisation of electrical grid is key.

In this respect **ZIGOR** is making a permanent contribution to the modernisation and automation of grids with its safe DC and AC power supply solutions. Proof of this are the innovative solutions included in this new catalogue linked to the development of Smart Grids in the energy sector's driving power companies.

ZIGOR, a leading company in the design and optimisation of technological solutions, continues to building trust of new customers and markets, in addition to those already consolidated in its extensive portfolio of traditional supplies in the transmission and distribution grid of electricity and railway companies.

ZGR TPS 120

COMPACT SWITCHING
CHARGER – RECTIFIER

Thanks to the
switching technology,
ZGR TPS 120 are
high performance
compact equipments.

The range of ZGR TPS 120 chargers based on high frequency switching technology benefits from the advantages inherent in such technology achieving a compact and easy-to-use equipment that can be installed in confined spaces.

ZGR TPS 120 units integrate all the functions of a high-performance charger in the same module, such as load management, battery disconnecter, remote alarms, protections, etc.

The ZGR TPS 120 are offered as independent modules or integrated into complete systems, which are adapted to the needs of the customer and available in voltages of 48 Vdc, 24 Vdc or 12 Vdc.

Standard



Cabinet



Applications



TELECOM



INDUSTRY



DATA
CENTERS



RAILWAY
SECTOR



FACILITIES



ELECTRICITY
SECTOR

Characteristics

- » Cost-effective and reliable
- » Connection strip built into the unit itself
- » Natural convection
- » Easy installation and maintenance of batteries
- » Switching technology
- » Wide range of voltage from 12 to 48V


* *Optional*

- » Control and signalling
 - Battery minimum voltage
 - Voltmeter and ammeter *
 - Charger fault
 - Dry contacts for remote signalling
- » Battery management
 - Ni-Cd or Lead-acid batteries
 - Battery and load protection fuses
 - Current limitation
 - Low Voltage Disconnection (LVD)


TECHNICAL SPECIFICATIONS				
Model		ZGR TPS 120		
INPUT ELECTRICAL CHARACTERISTICS				
Nominal voltage <i>Customized configurations under demand</i>		220 V ± 10 %		
Nominal frequency		50 Hz ± 5 %		
OUTPUT ELECTRICAL CHARACTERISTICS				
Presence of mains and charged battery	TPS 120	Flotation voltage (Pb)	Maximum voltage (Ni-Cd)	Units (Ni-Cd)
	12 V / 10 A	13,65 V ± 1 %	-	-
	24 V / 5A	27,3V ± 1 %	27 V	18
	48 V / 2,5A	54,6V ± 1 %	55,5V	37
Mains absence	Battery	Battery capacity in Ah (20 h at 1,75 V/cell)	Autonomy at nominal current (8-10 A)	Maximum recharging current of the battery
	Pb 48V 2,5A	7	2h.	0,7A
		12	3 h. 45 m.	1,2A
		18	6h.	1,7A
	Pb 24V 5A	12	1 h. 30m.	1,2A
		18	2 h.40m.	1,7A
		26	4 h.15m.	2,7A
	Pb 12V 10A	18	1h.	1,7A
		26	1 h. 45m.	2,5A
		33	3h.	3,7A
	Ni-Cd 48 V 2,5A	4	1 h. 30 m.	0,13A
		7	2 h. 30 m.	0,23A
		14	5h.	0,46A
	Ni-Cd 24 V 5A	4	45 m.	0,13A
		7	1 h. 15m.	0,23A
		14	2 h. 30m.	0,46A
MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS				
Operation temperature range		0 °C ÷ 50 °C		
Storage temperature		-40 °C ÷ 80 °C		
Cooling		Natural convection		
Operating altitude		≤ 1000 m		
Relative humidity		5 - 95 % (without condensation)		
Dimensions (HxWxD)		100 x 122 x 285 mm		
Approx. Weight		2,2 kg		
STANDARDS				
Low voltage european directive		73/23/CEE-93/68/CEE		
EMC european directive		89/336/CEE-93/68/CEE		

These specifications may change without notice

Connections

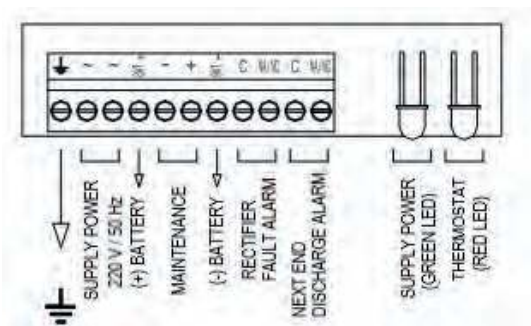

Block diagram

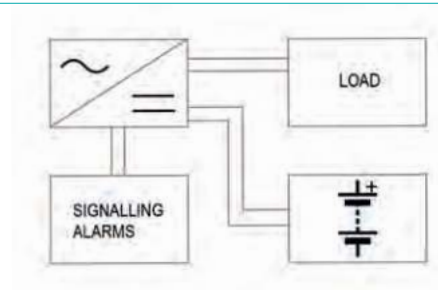

ZGR TPS 120/200 NG

COMPACT SWITCHING CHARGER – RECTIFIER
SMART GRID



ZGR TPS 120/200 NG

have compact design
in high frequency
technology.

ZGR TPS 120/200 NG equipments are 48 V battery rectifiers-chargers, capable of managing lead or lithium batteries of up to 18 Ah of capacity for industrial applications, remote controls, remote control for transformer centres and applications a power supply secure tele-controlled in needed.

The total powers that these equipments can supply are 120 W and 200 W respectively. They can also supply (without battery) 10 seconds lasting peaks of 180 W and 400 W, depending on the model. The galvanic isolation between input and remaining circuits is 1 0kV. Unlike other equipments, ZGR TPS 120/200 NG range includes a system to test the state of health of the battery. This battery test can be done automatically or manually from outside.

ZGR TPS 120/200 NG has an Ethernet connection through which locally or remotely, it can be monitorized, make changes over the settings, even update the equipments firmware. It also supports SNMP to incorporate in the supervision systems.



Applications



TELECOM



INDUSTRY



DATA
CENTERS



RAILWAY
SECTOR



FACILITIES



ELECTRICITY
SECTOR

Characteristics

- » Compact design
- » High efficiency
- » High frequency switching
- » Easy installation and maintenance
- » Battery management
 - Automatic and periodic battery test
 - Autonomous Energy Management
 - Communication with battery BMS (only lithium version)
- » Control and signalling
 - Integrated communications with web services or SNMP for configuration and reading of equipment measurements
 - Web interface for displaying variables and status, setting parameters and alarms, viewing event log, sending orders and updating firmware remotely
 - Dry contact alarms
 - LED signalling on the front

ZGR TPS 120/200 NG COMPACT SWITCHING CHARGER – RECTIFIER - SMART GRID

Communication gateway integrated: It enables the communication via Web Server (http). It includes advanced authentication (LDAP), parameterization, (XML) and time synchronization (NTP) features.

The Web Server allows the user to access the following data: status, measurements, configuration, alarms, control, network, equipment, etc.




TECHNICAL SPECIFICATIONS		
Model	ZGR TPS 120 NG	ZGR TPS 200 NG
AC INPUT ELECTRICAL CHARACTERISTICS		
Power supply voltage	230 Vac -20% /+15% ⁽¹⁾	
Nominal frequency	50 – 60 Hz	
Power factor	> 0,6	
OUTPUT ELECTRICAL CHARACTERISTICS		
Output voltage / Battery in fast charge mode (lead version)	59V ± 0,5 %	Configurable temperature compensation
Output voltage/ Battery in flotation mode (lead version)	54,24V ± 0,5 %	
Output voltage (litium version)	55,6V	
Voltage range	39 – 60 V	
Ripple	< 50mVpp	
Maximum total permanent current	3 A	5,2A
Maximum current during 10 mins	4,6A	10,3A
Permanent total power	120 W	200W
Total power during 10 mins	180 W	400W
Efficiency	> 75 %	
Battery charge current limitation ⁽²⁾	0,25 A	1,3A
COMMUNICATIONS		
Monitoring	Web interface	
Communications	Ethernet, SNMP	
PROTECTIONS		
Battery	Temperature compensation (configurable), electronic limitation of the charging current, protection against deep discharge of the battery by means of a relay in series	
AC input	Overcurrent protection by input fuse	
DC output	Varistor surge protection, electronic limitation of the charger current	
Dielectric rigidity Input - Other circuits	10 kVAC 50 Hz 1 min	
Dielectric rigidity Ground - Output	2 kVAC 50 Hz 1 min	
MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS		
Cooling	Natural convection	
Range ambient temperature	-10°C to 60°C	
Degree of environmental protection	IP20	
Operating altitude	< 1000 m without power loss	
Relative humidity	5 to 90 % without condensation	
Dimensions (W x D x H)	250 x 115 x 130 mm (rear fixing 280 x 115)	
Approx. Weight	5 kg	
STANDARDS		
Marks	CE	
General directives	2006/95/CE (UNE-EN 61000-6-2 UNE-EN 61000-6-4)2006/95/CE (EN 50178)	

Dimensions



Connections

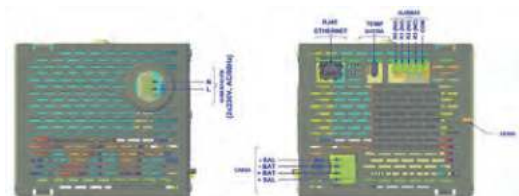

⁽¹⁾ Optional other input voltages
⁽²⁾ Parameterizable according to the characteristics of the battery up to the maximum current of the equipment
 vThese specifications may change without notice

CONNECTIVITY



ZGR SWIT NG

SWITCHING CHARGER - RECTIFIER



ZGR SWIT NG

modules and equipments provide maximum efficiency with a highly compact design.

The range of ZGR SWIT NG chargers, based on high frequency switching technology, benefits from the advantages inherent in such technology achieving a compact and easy-to-use equipment that can be installed in 19" cabinets.

ZGR SWIT NG units integrate all the functions of a high-performance charger in the same module, such as charge management, battery current limitation, remote alarms, end of discharge, protections, among other functions.

ZGR SWIT NG are offered as independent modules or integrated into complete systems. ZIGOR has developed the ZGR SWIT NG range, a rectifier / charger system that ensures the supply of consumers at all times, both in the presence of the mains and in the absence of it, until the end of the system's battery autonomy.

ZGR SWIT NG System



ZGR SWIT NG Module



Applications



TELECOM



INDUSTRY



RAILWAY
SECTOR



ELECTRICITY
SECTOR

Characteristics

- » High efficiency
- » Wide range of customized solutions from 500 to 1000 W in 24/48/110/125V
- » Integrated battery disconnecter
- » Reduced voltage harmonic distortion
- » Low input current distortion
- » Battery temperature compensation*
- » Easy installation, front wiring
- » Ni-Cd or sealed Pb battery management
- » Installation in integrated wall cabinet, module 19" and battery

» Control and signalling

- Rectifier defect
- Battery ground leakage*
- Maximum output voltage
- Next end of autonomy
- Presence of mains
- Voltmeter and ammeter*
- Dry contacts for remote signalling

» Protections

- Magnetothermal battery protection
- Overvoltage protection
- Input fuse protection*
- Module over-temperature
- Short-circuit
- Current limitation
- Low Voltage Disconnection (LVD)

* Optional

ZGR SWIT NG SWITCHING CHARGER - RECTIFIER



TECHNICAL SPECIFICATIONS

Model	ZGR SWIT NG		
Output voltage	24 Vcc	48 Vcc	110/125 Vcc

INPUT ELECTRICAL CHARACTERISTICS

Nominal voltage	230V \pm 15 %		
Nominal frequency	50Hz \pm 10 %		
Power factor	0,99 for charge > 60 %		

OUTPUT ELECTRICAL CHARACTERISTICS

Nominal voltage	24 Vcc	48 Vcc	110 / 125 Vcc.
Nominal frequency	20 or 40 A	10 or 20 A	4 or 8 A
Output voltage ripple	< 100 mV rms < 200 mVpp	< 100 mV rms < 200 mVpp	< 100 mV rms < 300 mVpp
Charge current limitation	20 A \pm 5 %	10 A \pm 3 %	4 A \pm 5 %
Short-circuit current	< 20 A	< 10 A	< 5,5 A
Efficiency	> 87 %		

BATTERIES

Num. of elements Pb	12	24	54 or 60
Num. of elements Ni - Cd	18 \div 20	36 \div 40	86 or 98
Output voltage	18 - 30 Vcc	36 - 60 Vcc	83 - 144 Vcc

MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS


Protections	Battery circuit breaker protection, surge protection, input fuse protection, module overtemperature, short-circuit, current limitation, end of discharge limitation
Operation temperature range	0°C to 50°C
Storage temperature	-40°C to 80°C
Operating altitude	\leq 1000 m without power loss
Relative humidity	< 95 % without condensation
Dimensions (HxWxD)	132 x 483 x 278 mm

STANDARDS

Low voltage european directive	CE UNE - EN 50178 (1998)
EMC european directive	UNE - EN 61000-6-2 (2001), UNE - EN 61000-6-4 (2001)

*Special configurations on demand
These specifications may change without notice*

Internal architecture

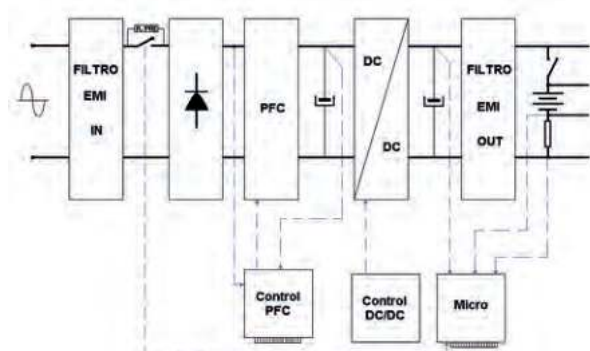

Dimensions



ZGR TELSIS APS

MODULAR SWITCHING CHARGER - RECTIFIER



ZGR TELSIS APS rectifiers - chargers range combines great flexibility with high performance.

ZGR TELSIS APS battery chargers - rectifiers have been designed to respond to the new needs of the battery charger market, improving the performance and flexibility of the system for both telecom and industrial applications.

Being modular equipment, it is not necessary a baseline oversizing, which means an initial investment savings. Their small size and high energy density allow them to be installed in the same locations of the loads and as a result, shorter distances and wiring sections are required, obtaining improvements in distribution. High frequency switching technology allows parallel connection with automatic load sharing. They also allow the configuration of redundant systems n+1, n+2.

Moreover, ZGR TELSIS APS operates autonomously without the need for any auxiliary elements and is controlled and managed at all times by the Central Management Unit. Thanks to the possibilities of remote communication, the system can be controlled and monitored in real time from a single control center. This feature allows diagnosing possible problems with sufficient anticipation to plan maintenance interventions, both preventive and corrective, which will result in a reduction in costs (manpower, travel, etc.).



Applications



TELECOM



INDUSTRY



RAILWAY
SECTOR



ELECTRICITY
SECTOR

Characteristics

- » Compact design
- » High efficiency
- » Easy maintenance
- » Control and supervision of the equipment via Web Server
- » Possibility of progressive power increase
- » Configuration of redundant systems n+1, n+2

» Applications

- Telecommunications
- Action on high and medium voltage distribution circuits through on / off switches
- Power supply of converters, emergency lighting systems, large areas, etc.
- Signalling, control and command centers
- Solar energy applications
- DC security applications
- Substations and Power Plants

ZGR TELSIS APS MODULAR SWITCHING CHARGER - RECTIFIER

ZGR TELSIS APS provides centralized monitoring, control and management of chargers - rectifiers. Supervision is based on a series of elements that incorporate microprocessors and are linked by an internal communications network.

The fundamental elements are:

Central Management Unit

It presents the status of the equipment, allows local action and configuration and acts as an external communication link.

Communications gateway (optional)

It allows remote communication via SNMP and WEB (http).

The central supervision unit and the gateway (optional) are integrated.

Rectifier module


It includes the intelligence necessary for monitoring its status, alarms, cooling control, output voltage, current limitations, etc.

This Web Server allows the user to access the following menus in different languages:

- Status
- Configuration
- Events
- Orders



Block diagram

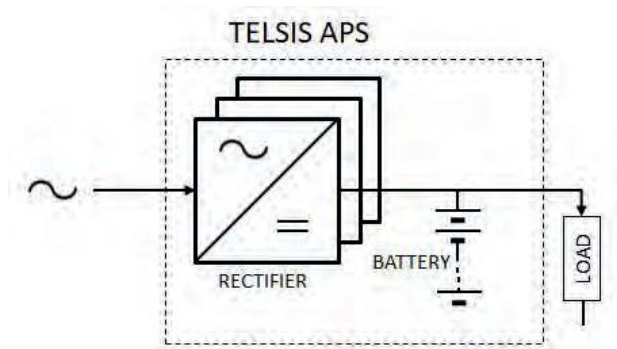

ZGR Telsis APS Elements

- Rectifier rack
- CC distribution rack
- Mixed rectification and distribution board
- Reserve board and continuity (Batteries)
- Auxiliary systems
- Central Management Unit
- Batteries: Pb (open or sealed) or Ni - Cd



Rectifier modules



ZR2048/ZR3048 Rectifier module



ZR30110 Rectifier module

TELSIS APS 48 V 2000 - 24000 W			
ZR 2048 RECTIFIER MODULE			
RACK	UNITS	POWER	IMAX RACK @ V NOMINAL OUTPUT
1U / 19"	1 - 4	2000 - 8000 W	166 A @48V
3U / 19"	1 - 12	2000 - 24000 W	500 A @48 V

TELSIS APS 48 V 3000 - 36000 W			
ZR 3048 RECTIFIER MODULE			
RACK	UNITS	POWER	IMAX RACK @ V NOMINAL OUTPUT
1U / 19"	1 - 4	3000 - 12000 W	240 A @48V
3U / 19"	1 - 12	3000 - 36000 W	720 A @48V

TELSIS APS 125V 3000 - 27000 W			
ZR 30110 RECTIFIER MODULE			
RACK	UNITS	POWER	IMAX RACK @ V NOMINAL OUTPUT
1U / 19"	1 - 2	3000 - 6000 W	50 A @125V
5U / 19"	1 - 9	3000 - 27000 W	225 A @125V

Racks



Rack 4 x ZR3048 or 4 x ZR2048



Rack 12 x ZR3048 or 12 x ZR2048



Rack 2 x ZR30110



Rack 9 x ZR30110

RECTIFIER MODULES TECHNICAL SPECIFICATIONS			
Model	ZR2048	ZR3048	ZR30110
Voltage	48V	48V	125V
INPUT ELECTRICAL CHARACTERISTICS			
Voltage	230 Vac, 50 / 60Hz		
Voltage range	85 - 175 - 300 Vac	85 - 185 - 300 Vac	90 - 175 - 300 Vac
Frequency range	45 - 65 Hz		
Power factor	> 0,99 de 20 % - 100 % output power		
Efficiency	> 92 % (> 50 % output power)		
Maximum input current	12,7 A	19A	19A
OUTPUT ELECTRICAL CHARACTERISTICS			
Nominal power	48V	48V	125V
Voltage range	43 - 60V	43 - 60V	80 - 155V
Maximum current	41,7 A	60A	27,3A
Maximum power	2000W	3000W	3000W
PROTECTIONS			
Over-temperature	Auto power off		
Reverse – polarity	Output fuse with diode		
Overvoltage	Adjustable limit		
Battery test	Yes		
MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS			
Operation temperature range	-10 °C to 50 °C		
Extended temperature range	50 °C to 70 °C with automatic power reduction (derating)		
Storage temperature	-20 °C to 70 °C		
Operating altitude	< 2500 m		
Relative humidity	5 to 95 % without condensation		
STANDARDS			
Marks	CE		
General directives	2004/108/CEE, EMC (61000-6-4, 61000-6-2), IEC 60146-1-1, EN 50178		


These specifications may change without notice

Dimensions of the complete system

TELSIS ZGR APS 48 V 27 kW *



TELSIS ZGR APS 110 V 27 kW *

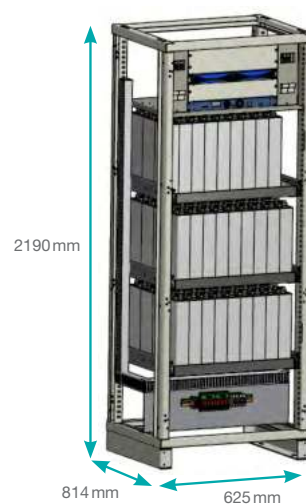

** Customizable equipments. Orientative photos and measurements.*

ZGR MIT NG range, thanks to the robustness of its design, ensures a high-reliability continuous current supply.

ZGR MIT NG range consists of battery chargers - rectifiers of conventional thyristor technology, controlled by microprocessor, in single-phase and three-phase product versions.

Zigor has combined the proven reliability of thyristor technology with the microelectronics functionalities, offering the ZGR MIT NG range at a maximum level in terms of performance and features.

The ZGR MIT NG range ensures the user a quality continuous supply. Zigor's wide experience in power electronics systems has allowed the design of a range of easily customizable equipment.



Applications



TELECOM



INDUSTRY



DATA
CENTERS



RAILWAY
SECTOR



FACILITIES



ELECTRICITY
SECTOR

Characteristics


- » Galvanic isolation
- » Complete thyristor bridge
- » Automatic disconnection due to minimum battery voltage (LDV) *
- » Voltage dropping device *
- » Temperature and electrolyte level sensors *
- » Hall effect current sensors *
- » Customized output voltage filtering according to user specification *
- » Thermomagnetic input protection
- » Overvoltage protection by varistors at input and output
- » Distribution adaptable to user requirements

* Optional

- » Control and signalling
 - Battery voltage and load measurements
 - Charger, battery and load current measurements
 - Comprehensive monitoring and signalling of charger status
 - Local alarms with LCD and remote with relays
 - Communications and remote management gateway with the possibility of implementing different protocols: MODBUS, SNMP, etc. *
- » Battery management
 - Charge Ni-Cd (open) y Pb (open and sealed)
 - Battery and charger current limitation
 - Charging modes:
 - » Ni-Cd and Pb open: flotation, fast charge, exceptional charge
 - » Pb sealed: flotation, fast charge, automatic fast charge and manual charge

Communication gateway integrated. It enables the communication via Web Server (http).

The Web Server provides full access to all information of ZRG MIT NG: status, measurements, configuration, alarms, control, network, equipment, etc.



TECHNICAL SPECIFICATIONS

Model	ZGR MIT NG 1	ZGR MIT NG 3
INPUT ELECTRICAL CHARACTERISTICS		
Nominal voltage ⁽¹⁾	230 V + 10 - 15 %* (Single-phase)	400V + 10 - 15 %* (Three-phase)
Frequency	50 / 60 Hz ± 5 %	
Power factor	0,7 ~ 0,9 (on request)	
OUTPUT INPUT ELECTRICAL CHARACTERISTICS		
Nominal voltage	12/24/48/110/125/220 V	
Ripple voltage with batteries	< 1 %	
Ripple voltage without batteries	< 2 %	
Ripple current in batteries ⁽¹⁾	≤ 5 %	
Voltage stability ⁽¹⁾	± 1/2 % (with/without battery)	
Dynamic regulation	< 2 % (10–90 % of charge)	
Charger current limitation ⁽¹⁾	100 % (up to 120 % optional)	
Battery charge current limitation	Configurable	
Transfer time	<300 ms	
COMMUNICATIONS		
Monitoring	Websever TCP/IP, control panel	
Communications	ModBus RS485	
OTHERS		
Active parallel	Optional (up to 2 units)	
Dry contacts	4 (8 optional)	
Protections	Overvoltage, over-temperature, current limitation, short-circuit, input/output high/low voltage	
Cooling ⁽¹⁾	Natural convection	
Working temperature	0 to 45 °C (50 °C on demand)	
Protection degree	IP 20 (on request up to IP54)	
Noise level	< 63 dBA	
Operating altitude	< 1000m without power loss (up to 4500 m on demand)	
Relative humidity	0-95 % without condensation (up to 100% on demand)	
STANDARDS		
Marks	CE	
General directives	EN 50178 (1998), EN 61000-6-4 (2001), EN 61000-6-2(2001), EN 61000-3-2, EN 61000-3-3, IEC 60146-1-1	

ZGR MIT NG STANDARD RANGE

Output voltage	Model	Current (A)										
		5	7.5	10	15	25	35	50	75	100	125	
12 V	MIT NG 1											
	MIT NG 3											
24 V	MIT NG 1											
	MIT NG 3											
48 V	MIT NG 1											
	MIT NG 3											
110-125 V	MIT NG 1											
	MIT NG 3											
220 V	MIT NG 1											
	MIT NG 3											

⁽¹⁾ Special configurations and other powers on request
These specifications may change without notice

CONNECTIVITY



CUSTOMIZABLE



ZGR MIT

HIGH RELIABILITY RECTIFIER-LOADER FOR SMART GRIDS



The **ZGR MIT** range, thanks to its robust design and high performance, ensures high reliability DC power to critical consumers on Smart Grids.

Given the current requirements of new smart grid developments, the ZGR MIT range represents a major evolution in customisation and innovation over the conventional ZGR MIT range.

The new single-phase and three-phase ZGR MIT systems allow the user to have high quality DC power at the same time as the highest performance required by Smart Grids.

The wide knowledge of Zigor in this type of solution has allowed to adapt to the fast trend of the market, providing the customer with a differential value in monitoring and configuration of the characteristics of the power solution at both hardware and software level.



Applications



TELECOM



INDUSTRY



DATA
CENTERS



RAILWAY
SECTOR



FACILITIES



ELECTRICITY
SECTOR

Characteristics

The ZGR MIT has the characteristics of the ZGR MIT NG and also:

- » 7" Multifunction Touch Screen
- » Possibility of paralleling equipment
- » Active load-sharing
- » Battery test
- » Calibration and parameterisation of the equipment via Ethernet/Display
- » Management of redundant equipment and dual power systems with single control panel
- » Automatic switching via internal management
- » Measurement of battery temperature
- » Configurable digital inputs
- » Signaling alarm cards with LEDs in each relay.
- » Remote sensing of battery parameters (temperature sensor, LVD, electrolyte level, voltage, current....)
- » Multiple topologies
- » Soft start
- » Signalling and control
 - Local and remote management
 - Web interface for displaying variables and status, setting parameters and alarms, displaying events historic, sending orders and updating firmware remotely.
- » Battery management
 - Charge Ni-Cd, Pb and Li batteries
 - Limitation of charger and battery current
 - Loading regimes:
 - » Ni-Cd: floating, automatic fast loading, loading manual, exceptional load
 - » PB: floating, manual loading, periodic loading
 - » Lithium: depending on battery

ZGR MIT RECTIFIER – HIGH RELIABILITY CHARGER SMART GRIDS

TECHNICAL SPECIFICATIONS		
Model	ZGR MIT 1	ZGR MIT 3
INPUT ELECTRICAL CHARACTERISTICS		
Rated voltage (Vac)	120/127/220/230/240/277 V ± 10/15/20%	208/220/380/400/415/480 V ± 10/15/20%
Power factor	0,7 ~ 0,95 (on request)	
Frequency	50/60 Hz ± 5 %	
OUTPUT ELECTRICAL CHARACTERISTICS		
Rated voltage (Vcc)	24/48/110/125/220/370 V	
Ripple voltage with batteries	± 1,5 %	
Ripple voltage without batteries	< 2 %	
Ripple current in the battery	≤ 5 %	
Voltage stability	± 1/2 % (with/without battery)	
Dynamic regulation	< 2 % (10–90 % load)	
Charger Current Limitation	100 % (up to 120 % optional)	
Limitation of battery charge current	Configurable	
Transfer time	< 300 ms	
MONITORING		
Control panel	7" Touch Screen and LED indicators	
Communications	Websever TCP/IP, Modbus TCP, DNP3, MMS, SNMP, web services	
PROTECTIONS		
Overvoltage	Yes	
Overtemperature	Yes	
Current limitation	Yes	
Shortness	Yes	
High/low input/output voltage	Yes	
OTHER		
Parallel	Optional (up to 2 units)	
Dry contacts	4 (optional up to 12 on 4 cards)	
Battery test	Yes, discharge test	
Alarms	Yes, configurable, possibility to add external events	
Type of protection	IP 20 (on request up to IP54)	
Cooling	Natural or forced convection according to power	
Noise level	< 60 db depending on model	
Working temperature	Indoor not conditioned (4–40°C)	
Altitude	1000 m without power reduction (up to 4500 m on demand)	
Relative humidity	0 — 95 % (without condensation)	
Vibration	3M1 Class (1 m/s)	
Storage	15-25°C / 30-90% HR	
STANDARDS		
Marking	CE	
General directives	EN 50178 (1998), EN 61000-6-4 (2001), EN 61000-6-2(2001), EN 61000-3-2, EN 61000-3-3, IEC 60146-1-1	
Specific directives	EN 60529, EN 50102, EN60255-5	

*Special configurations and other powers on demand
These specifications can change without notice*



The new ZGR MIT incorporates a touchscreen on the front of the equipment improving user interaction.

LOCAL CONTROL

Screen: Touch screen of 7".

Menu: Intuitive menu for equipment management and configuration.

Alarms: 5 LEDs bicolor to notify configurable events.

Events: Monitoring of equipment events and external events thanks to digital inputs.


REMOTE CONTROL:

WEB Server: Easy access to parameterisation and monitoring of all variables.

Communications Protocol: Multiple communications protocols for integration of equipment into the client network (DNP3, MODBUS RTU, MODBUS TCP/IP, MMS,...).

Software: Possibility of remote firmware update.

Principle of operation

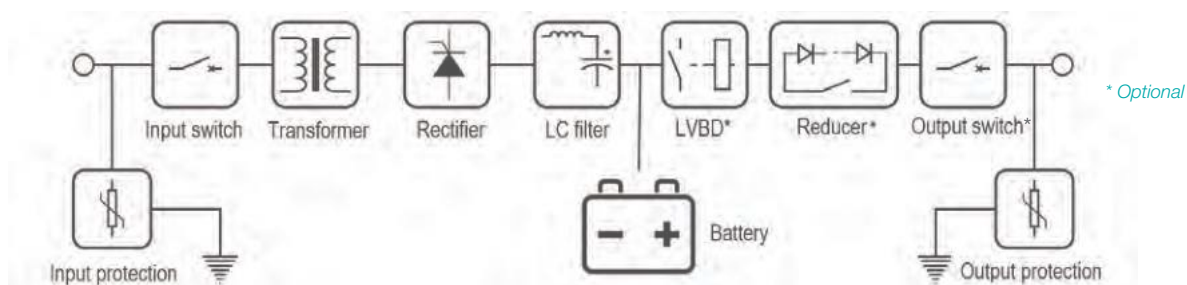


The power supply of the equipment is performed by direct connection to the AC current grid (50 Hz/60 Hz), either 230 V single phase (MIT1) or three-phase 400 V (MIT3). Also other nominal values on demand.

The MIT Charger is capable of charging both sealed or open lead and nickel-cadmium batteries at nominal voltages of 24, 48, 110, 125 and 220 V (others on demand). Also Lithium batteries according to the manufacturer's charging regime.

Optionally, the equipment could incorporate a voltage reducer (Reducer) to reduce voltage when voltage levels are harmful to loads.

The charger also has a power limitation on the output of the charger and on the battery charge so that these currents never exceed the pre-set limits and, thus, protect the correct operation of the equipment.

There are multiple configuration possibilities for the MIT ZGR.

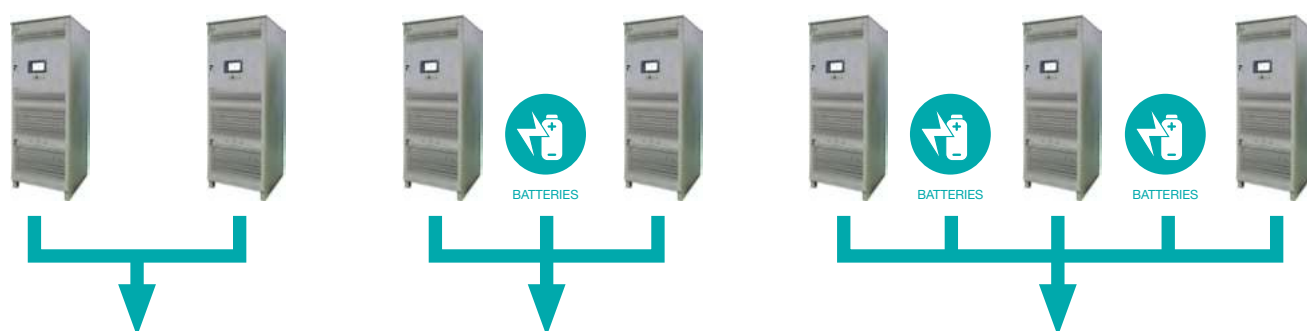

Other configurations and other powers under consultation.

INTEGRAL MANAGEMENT:

The DSP (Digital Signal Processor) controls all of the system's analog and digital variables, thus making it the most efficient thyristor loader on the market.

Soft start: Control of the start-up current to avoid high consumption peaks.

Load-sharing: the charger efficiently controls the current supplied by dividing it among the total number of equipment.

Events: Monitoring of all variables, total customisation of events.



FLEXIBILITY:

Capable of operating in countless topologies in the most efficient and accurate way.

Topologies: From the simplest configuration, charger + battery to parallel up to 7 systems with multiple remote batteries.

Envelope: Infinity of sizes and configurations of equipment, chests, cabinets, multiple cabinets, etc.

Protection: IP20, see other options.



PROTECTIONS:

Overvoltage: Varistors card for both AC and DC protection.

Over temperature: Protection against overheating of the thyristor bridge as well as batteries and equipment.

Current: Limitation of battery charging current and use, protecting both equipment and battery.

Short circuit: Full bridge of short-circuitable thyristors, no additional protection required.

Voltage: High or low input or output voltage.



BATTERIES:

Custom charger for each battery improving performance and service life.

Types: Compatible with energy accumulation technologies: NiCd, Pb, Li...

Loading: adjusted for each case, by UI load type, constant current/voltage constant.

Management: Battery test (discharge test) to analyse the state of the battery and avoid critical errors due to defect battery in emergency operation.

Remote battery card: Remote battery management, temperature measurement, current and end of remote discharge.

Installation: Inside the enclosure, or in independent rack (anti-seismic option).





I N D U S T R Y

At **ZIGOR** we offer **backup solutions against electrical disturbances and energy quality improvement** for the most demanding industrial environments. The deep knowledge of the issues of the critical processes of our clients, allows us to design **taylor-made solutions** with a reduced impact on the final installations, so that they can focus on what they do best.

Nowadays industry requires more **robust and flexible solutions**, with scalable powers and autonomies to work in very diverse environments. Hence, in **ZIGOR** we offer the market the largest power range and back-up support in **application specialized equipment**, from small consumption to large scale facilities.

Since more than 10 years, we continue developing solutions applied to industrial processes whose stoppage causes millions losses. As in the case of **Oil & Gas sector, Manufacturing industry or Data Centers** that require high reliability of continuous processes avoiding machine failures or data losses.

Moreover, working on the five continents gives us the visibility to develop **global solutions**, meeting the specific needs of each sector.

Thanks to our commitment to **innovation** we can offer the highest technology in protection solutions against disturbances of the electricity grid and, support the critical processes in which even the lives of people are at stake.

Likewise, **ZIGOR** has a **wide range of solar inverters for industrial self-consumption applications**. Our equipments help optimizing the electricity bill by taking advantage of solar radiation both at the time it occurs and at night time using efficient battery storage systems of various technologies. These equipments are under the **Energy** range where you can check for more details.

ZGR AVC DVR

DYNAMIC VOLTAGE RESTORER



ZGR AVC DVR is an innovative system of compensation of voltage sags for the continuity of industrial processes.

ZGR AVC DVR is an innovating system designed to mitigate and eliminate the effect of electrical disturbances on critical industrial processes through the elimination of sags and a continuous regulation for minor disturbances. ZGR AVC DVR guarantees the quality of the grid meeting the demands of industrial production processes while keeping stable and constant the output voltage regardless of energy grid voltage variations. It consists of a transformer, a bidirectional rectifier unit, plus an inverter. The aim of the ZGR AVC DVR is to compensate disturbances, unbalanced voltages, and to regulate them in case of possible fluctuations and overvoltages. Moreover, ZGR AVC DVR monitors, controls and records events that occur in the system, allowing subsequent viewing through the touch control panel.



Applications



TELECOM



INDUSTRY



DATA
CENTERS



RAILWAY
SECTOR



ROBOTS





LOGISTICS
CENTERS

Characteristics

- » Mitigates three-phase voltage sags up to 70% of depth or single-phase interruptions
- » Continuous regulation to offer high stabilization ($\pm 1\%$)
- » High efficiency supply system $> 98\%$
- » Not battery required or other energy storage components
- » Compensation of voltage sags even for long times (up to 30 sec)
- » Swell and overvoltage compensation
- » Independent compensation per phase
- » Compensation of balanced and unbalanced voltage drops
- » Automatic bypass
- » Withstand 150% overload for 1 second in normal mode
- » Less than 3 milliseconds response-time
- » Energy flow in both directions
- » Quick response speed
- » Touch control panel
- » Customizable for other powers, sags and/or voltage
- » Modular design which facilitates O&M
- » Easy for connecting in parallel up to 3 equipments
- » Mitigates voltage sags according the standards: SEMI F47, IEC 61000-4-11 and IEC 61000-4-34 (depends on the model)

ZGR AVC DVR DYNAMIC VOLTAGE RESTORER


ZGR AVC DVR eliminates both three-phase and single-phase sags, considering that it compensates each phase independently. When a sudden drop in the input voltage (in green) occurs, ZGR AVC DVR acts quickly compensating it to ensure that the output voltage (in blue) remains stable.

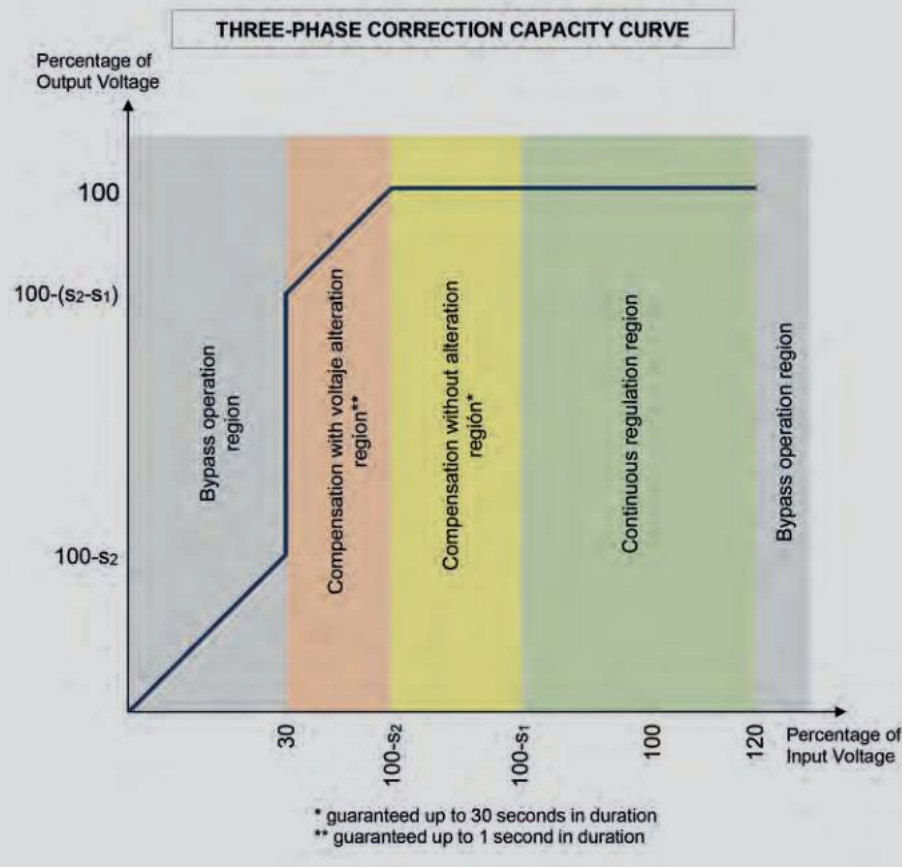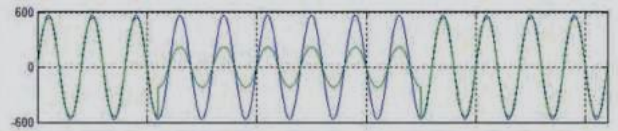

Maximum Sag Correction (S_2)	Continuous regulation range (S_1)	AVC DVR System Power	System Configuration	Power per Unit	Manual Bypass	
					380/400/415 Vac Systems	200/208/220 Vac Systems
-40%	+-20%	300 kVA	M	300 kVA	630 A	1250 A
		600 kVA	M+S	300 kVA	1250 A	3200 A
		900 kVA	M+2S	300 kVA	2000 A	3200 A
-50%	+20% -25%	220 kVA	M	220 kVA	630 A	1250 A
		440 kVA	M+S	220 kVA	1250 A	2000 A
		660 kVA	M+2S	220 kVA	2000 A	3200 A
-60%	+20% -30%	150 kVA	M	150 kVA	630 A	630 A
		300 kVA	M+S	150 kVA	1250 A	1250 A
		450 kVA	M+2S	150 kVA	1250 A	2000 A

AVC DVR 380 / 400 / 415 Vac

Weight: 1250 kg

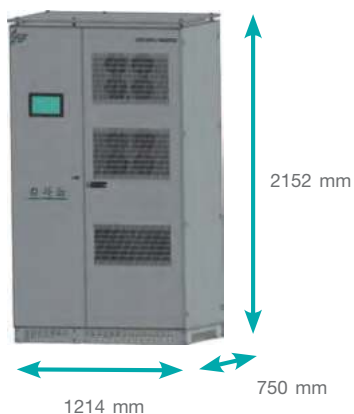

AVC DVR 200 / 208 / 220 Vac

Weight: 1600 kg



Bypass Manual 630 A

Weight: 200 kg



Bypass Manual 1250 / 2000 A

Weight: 375 kg (1250 A) / 575 kg (2000 A)




Bypass Manual 3200 A

Weight: 775 kg



The control panel allows the user to access the following data: status, measurements, configuration, alarms, control, network, equipment, etc.



TECHNICAL SPECIFICATIONS			
Model	40% sag models	50% sag models	60% sag models
INPUT ELECTRICAL CHARACTERISTICS			
Nominal voltage	200/208/220 or 380/400/415 Vac		
Voltage range (Vac)	± 20 %	+ 20 % - 25%	+ 20 % - 30%
Phase	3 phases+ground (neutral opcional)		
Frequency	50/60 Hz ± 10%		
Frequency variation (df/dt)	4 Hz		
OUTPUT ELECTRICAL CHARACTERISTICS			
Voltage	200/208/220 or 380/400/415 Vac		
Power range	150 - 900 kVA/kW	220 - 660 kVA/kW	150 - 450 kVA/kW
Regulation	± 1 %		
Phase	3 phases+ground (neutral opcional)		
Frequency	50 / 60 Hz		
Response time	< 3 ms		
Transfer time to Bypass	< 0,5 ms		
Overcharge capacity in normal mode	110 % - 30 s, 150 % - 1 s		
Overcharge capacity in bypass mode	200 % - 60 s, 500 % - 10 s, 3000% - 0,2 s		
GENERAL CHARACTERISTICS			
Maximum efficiency	> 98%		
Dielectric rigidity	2.5 kV – 1 minute		
Control panel	Touch panel		
Protections	Short circuits, current limitation, overload, RFI filter, necessary disconnections		
Paralellable	Up to 3 equipments (Master + 2 slaves)		
Maintenance switch	Yes (in slave equipments). Optional (in master equipments)		
Protection degree	IP 20		
Protective class	Class I		
Pollution degree rating	2		
Overvoltage category	III		
Vibration	Class 3M1		
IK impact degree	IK07		
Cooling	Forced ventilation		
Working temperature	0 ~ 40 °C		
Storage temperature	0 ~ 85 °C		
Noise level	< 65 dB		
Altitude	< 1000 m		
Relative humidity	0 ~ 95%, without condensation		
STANDARDS			
Marks	CE		
General directives	IEC 62477-1, IEC 61000-6-2, IEC 61000-6-4, IEC 60721-3-3		

AVC DVR of Medium Voltage available up to 3,6 MVA

For different voltages, powers, or configurations for other kind of sags, consult ZIGOR

For any other technical need or modification of existing ones, consult ZIGOR

These specifications may change without notice

ZGR DVC SEPEC is guarantee of continuity of supply for critical industrial processes

ZGR DVC SEPEC industrial UPS range is equipped with high performance technology to reduce the effect of electrical disturbances that may affect industrial processes.

Its design allows eliminating variations in voltage and frequency as well as voltage sags and short interruptions for most critical industrial processes. ZGR DVC SEPEC guarantees the continuity of the power supply in all those processes in which the maximum reliability of the supply is a fundamental requirement.

Its internal architecture enables it to work together with emergency generation units ensuring the complete elimination of interruptions in the supply mains and avoiding voltage outages.



Applications



TELECOM



INDUSTRY



DATA
CENTERS



RAILWAY
SECTOR



ROBOTS



LOGISTICS
CENTERS

Characteristics

- » High-efficiency emergency supply system > 99,5 %
- » From 200 KVA to 800 KVA (scalable units)*
- » Compatible with already installed protection systems
- » Maximum robustness
- » Integrable with existing supply guarantee systems: emergency generator units, gen sets, etc.
- » Web interface for monitoring and control
- » Touch control panel
- » LED signalling for quick visualization of the status of the inverters and batteries
- » Higher reliability, MTBF and life cycle
- » Voltage impulse elimination system*
- » DSP digital control system
- » Autonomy longer than 5 minutes (depending on consumption)
- » Advanced management system, battery verification and diagnostics
- » High efficiency batteries with low charging time and 100 % recyclable
- » Possibility of integrating a network analyser*
- » Low energy consumption
- » Does not introduce harmonics into the installation (upstream)
- » Timed relay for emergency mode
- » Capable of operating with regenerative loads (braker)*
- » Battery cabinet air-conditioned*
- » Security and reliability with minimum necessary investment and reduction of operating costs
- » Improved insulation with zigzag transformer for neutral

* Optional

TECHNICAL SPECIFICATIONS				
Model	ZGR DVC SEPEC 200	ZGR DVC SEPEC 400	ZGR DVC SEPEC 600	ZGR DVC SEPEC 800
INPUT ELECTRICAL CHARACTERISTICS				
Phases	3 phases + ground (neutral opcional)			
Nominal voltage	380 / 400Vac ± 15 %			
Frequency	50 / 60 Hz ± 10 %			
Current harmonic distortion	Does not introduce			
OUTPUT ELECTRICAL CHARACTERISTICS				
Apparent power	200 kVA	400 kVA	600 kVA	800 kVA
Power factor	1 (normal mode), 0.8 (emergency mode)			
Phases	3 phases + ground (neutral optional)			
Nominal voltage	380 / 400Vca ± 15 %			
Frequency	50 / 60 Hz ± 10 %			
Voltage harmonic distortion	< 1,5 % (in emergency)			
Waveform	Sine wave			
Inverter active redundance	Inverters in parallel			
Crest factor	3 : 1			
Power KVA / KW ⁽¹⁾	200 / 200	400 / 400	600 /600	800 /800
BATTERY				
Battery type	Sealed lead VRLA			
Batteries current ripple	0A (permanent regime)			
Service life diagnosis	Emergency cycle counter			
Air conditioned battery cabinets	Optional			
COMMUNICATIONS				
Monitoring	Web, touch control panel, LED signalling post			
Communications	Web Server, Modbus TCP/IP, SNMP, ModBus RTU (optional)			
PROTECTIONS				
Voltage impulses	Optional. Not degradable, performance threshold UNx1,1, Energy >900 jules			
Short-circuit protection	Yes			
Current limitation	Yes			
Overcharge	Yes			
Static and manual Bypass	Yes (without zero-crossing)			
Battery charger protection	Yes			
OTHERS				
Total efficiency	99,5 %			
Overcharge	120 % in permanent regime, 150 % during 10 seconds			
Range ambient temperature	IP21			
Cooling	Forced ventilation			
Operating temperature	0 ~ 40°C			
Storage temperature	0 ~ 85°C (excluding battery)			
Noise level	< 65 dB			
Operating altitude	< 1000 m			
Relative humidity	0 ~ 95 % (excluding battery)			
Approx. Weight	650 kg	950 kg	1345 kg	1575 kg
STANDARDS				
Marks	CE			
General directives	73/23/CEE-93/68/CEE, 2004/108/CEE			

(1) Equipment only FP = 1, equipment with standard batteries FP = 0,8. For other FP of equipment-battery set consult


Other voltages / autonomies on demand

Dimensions and weight without braker. Consult dimensions and weight of cabinets with/without air conditioned


These specifications may change without notice

Communication gateway integrated. It enables the communication via Web Server (http).


The Web Server allows the user to access the following data: status, measurements, configuration, alarms, control, network, equipment, etc. These same data are accessible directly from the touch control panel on the front of the device.

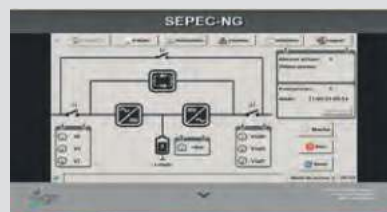

ZGR DVC SEPEC 200

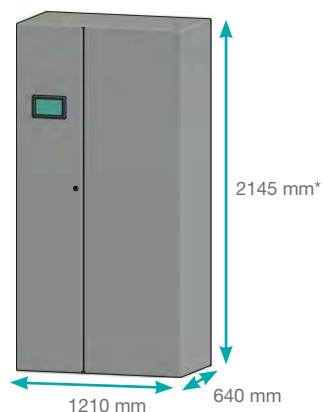

Batteries configuration

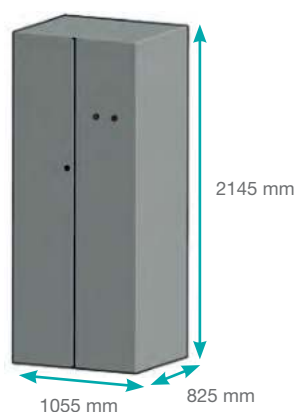

Equipment with signalling post: 2.445 mm.

Equipment with braker option: 2.555 mm.

Dimensions for battery standard cabinets.

They can be modified according to options included

ZGR DVC SEPEC 400



ZGR DVC SEPEC 600-800





LIFTING OF ROBOT
HEBEN DES ROBOTERS
LEVAGE DU ROBOT

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99

3



always ON

ZGR FAA / AHF

ACTIVE HARMONIC FILTER

ZGR FAA / AHF is a system that helps to eliminate harmonic distortion in the power grid.

The ZGR FAA / AHF helps to eliminate harmonic contamination in the grid, reducing power quality problems and enhancing a more efficient and safe use of energy.

The presence of harmonics increases the RMS current in electricity grids. The transmission of currents harmonics through system impedance creates harmonics which produce voltage distortions and in this way deteriorate the quality of the grid voltage. This leads to increased operation and energy costs, production/process stops, overheating and malfunctioning of electrical equipment.

The ZGR FAA / AHF is designed according to the latest state of the art in power electronics technology. The technology is installed in parallel with non-linear electrical loads. The active filter analyses the phase current together with the associated harmonics, generating a compensation current, which neutralizes the harmonic currents creating a practically sinusoidal waveform.



Applications



INDUSTRY



PHOTOVOLTAIC



DATA
CENTERS



FACILITIES



ELECTRICITY
SECTOR



LOGISTICS
CENTERS



SECURITY

Characteristics

- » High security and reliability
- » Harmonic compensation up to the order of 50° (individually selectable)
- » Flicker Compensation
- » Ultra-fast reactive power compensation (inductive and capacitive)
- » Phase and neutral cable balance
- » Compact design
- » Scalable modular system (25A - 600A)
- » Resonance detection
- » Digital control with intelligent FFT algorithm
- » Ethernet and Ethercat connection system
- » High performance and reliability
- » Insensitive to grid conditions
- » Protections:
 - Overload protection
 - Internal short circuit protection.
 - Over temperature protection
 - Over and under voltage protection
 - Inverter bridge.
 - Resonance protection
 - Fan failure alarm

Connectivity and monitorization

Communication via Modbus RTU 485 and Modbus TCP-IP. It allows the user to access all the data shown on the screen: status, measurements, configuration, alarms, control, network, equipment, etc.

7" LCD screen for displaying and debugging rack mounted modules.
User-friendly operation interface, with 800*400 colour graphic display.
Allows the user to check the operating status of the Filter and the status of the grid in real time.



TECHNICAL SPECIFICATIONS

Model	ZGR FAA / AHF		
Nominal voltage	380 V (228 to 456 V)	480 V (384 to 552 V)	690 V (480 to 790 V)
Frequency	43 – 62 Hz		
Compensation current (module)	25 A, 35 A, 50 A, 60 A, 100 A, 150 A	75 A, 90 A	75 A, 90 A
Compensation capacity in neutral terminal	3 times the compensation current (in case of 4 wire system)		
Compensation range of harmonic currents	2nd - 50th harmonic order, or specified order of harmonics 0 - 110%		
Harmonic reduction rate	>95%		
Power factor (PF)	Adjustable from -1 to 1		
Switching frequency/control	20 kHz / 20 kHz		
Reaction time	<50 μ s		
Global response time	<5 ms		
Harmonic compensation	Yes		
Reactive power compensation	Yes		
Unbalance compensation	Yes		

MONITORING

Screen	TFT 7" colour
Communication ports	RS485, network port (RJ45)
Communication protocols	Modbus RTU, TCP/IP (Ethernet)

PROTECTIONS

Failure alarm	Yes, 500 alarm logs max.
Protections	Overvoltage, under voltage, short-circuit, inverter bridge, over compensation


MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS

Working temperature range	-10 °C ~ +40 °C (without derating)	
Protection degree	IP20	
Working altitude	1500 m (without power loss)	
Noise level	<56 dB (depending on the model)	<65 dB (depending on the model)
Relative humidity	5 to 95% (without condensation)	
Cooling	Forced	

STANDARDS

Certifications	CE, IEEE 61000	CE, ETL (UL508), IEEE 61000
Standards	IEEE 519, ER G5/4	

These specifications may change without notice



U P S

From **ZIGOR**, a leading company with its own design and engineering, and more than 20 years of experience in the sector, we have developed a new range of UPS with the purpose of providing customized solutions to the new demands of the market in safe energy.

We have a complete range of electrical protection and management solutions. Single-phase and three-phase UPSs for all kind of applications from small offices and domestic environments to large industrial plants. In the event of a problem in the power supply, whether we need to make a safe shutdown or if we need to protect the integrity of the data, **ZIGOR** UPSs provide a reliable solution. In addition, all our professional devices have communication accessories for dry contact cards, SNMP card for network management or MODBUS protocols.

To help you find the most appropriate solution, we have divided our UPS catalogue into three main categories:

- **Small Office-Home Office (SOHO).** Where you can find the best solution to protect your PC, workstations, or audio-visual environments: ZGR Quick, Zgr Optime, ZGR Steady.
- **Networks and servers.** Double conversion online equipment to work in a professional environment with servers, Voice and data (VOIP), and other critical applications: ZGR Tower Pro, ZGR Efficient RT.
- **Industry and Data Centres.** Three-phase equipment to guarantee the continuity and control of critical applications, industrial processes, infrastructures and Data Centres: ZGR Scalable, ZGR Influence.

Our experienced technical support engineers are available to answer all your questions so that they can give you the necessary support when you need it.

Continuous improvement and Innovation are the two main objectives of **ZIGOR** that make our products always at the forefront of the efficiency and protection of Business Continuity in the five continents.

ZGR QUICK 600 – 800 VA

LINE-INTERACTIVE UPS



ZGR QUICK is the perfect solution for protecting against grid distortions at household and office.

ZGR QUICK is the solution for the protecting household and office equipment with a compact and versatile design.

AVR technology allows stabilizing a wide range input under/over voltages, preventing the excessive use of UPS function, thus reducing the battery discharge/charge cycles and increasing its life.

In absence of grid power, the load is supplied by the inverter that provides a simulated sine wave for sufficient time for secure shutdown of the most critical computer systems through control and monitoring software.

A push-button, a LED synoptic and user-replaceable battery make it an ideal device for everyone to protect against surges and small power failures.



Applications



DOMESTIC USE



PLUG & PLAY



USB PLUG




SCHUKO
PLUG

Characteristics

- » USB port up to 2 A included for charging mobile devices, tablets, etc.
- » 6 Schuko and 1 RJ45 sockets
- » Compact and ergonomic
- » 3 Sockets protected against power failures (UPS function)
- » 3 Sockets protected against surges to power devices with high current peaks (laser printers...)
- » Cold Start and Auto Restart function
- » Output stabilization with AVR system
- » User-replaceable batteries
- » USB interface for UPS monitoring
- » Desktop or on the floor placement
- » 3 year warranty

ZGR QUICK LINE-INTERACTIVE UPS

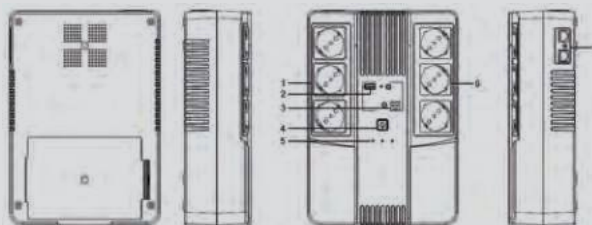

1. UPS output
2. USB charger
3. USB monitoring
4. Power on
5. Informative LED
6. UPS output
7. LAN/modem protection

TECHNICAL SPECIFICATIONS

Model	ZGR QUICK 600	ZGR QUICK 800
Power	600 VA / 360 W	800 VA / 480 W

INPUT ELECTRICAL CHARACTERISTICS

Voltage range	170 - 280 Vac (allows use with generators) single phase
Frequency	50 / 60 Hz \pm 10 %

OUTPUT ELECTRICAL CHARACTERISTICS

Nominal voltage	220 / 230 / 240 Vac \pm 10 % single phase
Frequency (battery mode)	50 / 60 Hz \pm 1 %
Waveform (battery mode)	Simulated sine
Transfer time	Typical 2 - 6 ms / 10 ms max

BATTERY

Type / Capacity	1 x 12 V / 7 Ah	1 x 12 V / 9 Ah
Hot Swap	Yes (user replaceable)	
Charge time	6 - 8 h / 90 %	
Protection	Overload and deep discharge	
Autonomy	5 mins (depends on consumption and battery status)	

MONITORING

Informative	LED
Alarms	Acoustics depending on alarm
Software	Windows / Linux / MAC

CONNECTIONS

Input	1 x IEC
Output	6 x Schuko
Protection	Modem / LAN RJ45
Communication	USB (software monitoring)
Extras	1 x USB Charger 2A

FUNCTIONS

On/OFF with battery (Cold Start)	Yes (allows UPS to run without mains power)
Auto Restart	Yes (restarts UPS functions after a failure or deep battery discharge)

ENVIRONMENTAL AND MECHANICAL CHARACTERISTICS

Cooling	Natural convection	
Operation temperature	0 - 40 °C	
Noise level (at 1m)	< 45 dB	
Relative humidity	0 - 95 % without condensation	
Dimensions (WxHxL)	202 x 93 x 293 mm	202 x 93 x 293 mm
Weight approx.	3,6 kg	4,9 kg

STANDARDS

Marking	CE
Directives	Low voltage directive: 2014/35/EU, EMC directive: 2014/30/EU
Standards	Safety: EN 62040-1, EMC: EN 62040-2, Accordance: EN 62040-3



*Green Power design that minimizes self consumption during normal operation
Battery charging system even with the UPS turned OFF
These specifications may change without notice*

IEC 62040 - 3



ZGR OPTIME 800 VA

LINE-INTERACTIVE UPS



The range **ZGR OPTIME** provides protection against overvoltage and transients surge of the power grid thanks to the latest digital technology.

The ZGR OPTIME series is the compact version managed by microprocessor and with LCD screen that provides real-time information of grid voltage and battery status.

ZGR OPTIME keeps your devices powered with a simulated sine wave long enough to eliminate small power failures.

The use of standard Schuko sockets avoids the need for additional adapter wires.

In addition, the connected equipment will be protected against mains surges, while the data lines (Internet / Telephone / Fax) are provided with protection against transients.



Applications



DOMESTIC USE



PLUG & PLAY




SCHUKO
PLUG

Characteristics

- » Automatic restart (once the battery is discharged and mains return)
- » Output stabilization with AVR technology and EMI/EMC filters for interference suppression
- » Cold Start and Auto Restart function
- » With LCD display for easy reading mains voltage and battery status
- » Fast charge function
- » Self-diagnosis of the operating state of battery and UPS
- » High battery reliability with microprocessor battery status monitoring
- » Schuko sockets to avoid adapter wires
- » USB monitoring and control software
- » Plug and Play System

ZGR OPTIME LINE-INTERACTIVE UPS

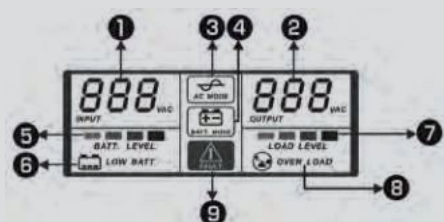



- | | |
|--------------------|-----------------------|
| 1 - Input voltage | 6 - Battery low alarm |
| 2 - Output voltage | 7 - Load level |
| 3 - Online mode | 8 - Overcharge alarm |
| 4 - Battery mode | 9 - General alarm |
| 5 - Battery level | |

TECHNICAL SPECIFICATIONS		
Model	ZGR OPTIME 800	
Power	800 VA / 480 W	
INPUT ELECTRICAL CHARACTERISTICS		
Voltage range	162 - 290 Vac (allows use with generators) single phase	
Frequency	50 / 60 Hz ± 10 %	
OUTPUT ELECTRICAL CHARACTERISTICS		
Nominal voltage	220 / 230 / 240 Vac ± 10 % single phase	
Frequency (battery mode)	50 / 60 Hz ± 1 %	
Waveform (battery mode)	Simulated sine	
Transfer time	Typical 2 - 6 ms / 10 ms max	
BATTERY		
Type / Capacity	1x 12V / 7Ah	1x 12V / 9Ah
Charge time	6 - 8 h / 90 %	
Protection	Overload and deep discharge	
Autonomy	5 mins (depends on battery consumption and state)	
MONITORING		
Informative	LED + LCD display	
Alarms	Acoustics depending on alarm	
Software	Windows / Linux / MAC	
CONNECTIONS		
Input	1x IEC	
Output	2x Schuko	
Protection	Modem / LAN RJ45	
Communication	USB and RS232 (software monitoring)	
FUNCTIONS		
On/OFF with battery (Cold Start)	Yes (allows UPS to run without mains power)	
Auto Restart	Yes (restarts UPS functions after a failure or deep battery discharge)	
ENVIRONMENTAL AND MECHANICAL CHARACTERISTICS		
Cooling	Natural convection	
Operation temperature	0 - 40°C	
Noise level (at 1 m)	< 45 dB	
Relative humidity	0 - 95 % without condensation	
Dimensions (WxHxL)	101 x 142 x 298 mm	101 x 142 x 298 mm
Weight approx.	4,3 kg	4,7 kg
STANDARDS		
Marking	CE	
Directives	Low voltage directive: 2014/35/EU, EMC directive: 2014/30/EU	
Standards	Safetv: EN 62040-1, EMC: EN 62040-2, Accordance: EN 62040-3	



Green Power design that minimizes self consumption during normal operation
Battery charging system even with the UPS turned OFF
These specifications may change without notice

FORMAT	IEC 62040 - 3
 TOWER	 VI TYPE

ZGR STEADY 1000-1500-2000 VA

LINE-INTERACTIVE UPS



ZGR STEADY is the range that improves power reliability of your critical devices with a pure sinus wave.

ZGR STEADY series offers an UPS solution with high efficiency level and confidence for all critical devices that need continuity and reliability in the power supply. They have very compact tower format to save space in server rooms, small offices and household use.

Likewise, the technology provided is Line-interactive through AVR technology and managed by microprocessor. It allows eliminating electrical grid fluctuations and keeps output voltage stable with pure sinewave, which is the best quality to power all types of loads, even the most sensitive to small power outages.

Thanks to AVR a lower use of the batteries is obtained, increasing their useful life and their availability to 100 % in case of intervention.

Its pure sine waveform output reduces the cost of complex filters and the electromagnetic interference (EMI).

For an intuitive use, it has a LCD display with all the information (input / output voltage, % of charge, % of battery, ...) and also, it has connectivity via USB interface with HID protocol, for use with monitoring software.



Applications



DOMESTIC USE



PLUG & PLAY




IEC PLUG

Characteristics

- » Available powers 1000 / 1500 / 2000 VA
- » Pure sinewave allows you to connect equipment that is not exclusively intended for the IT sector, so the range of uses is extended
- » Automatic restart after electrical grid failure
- » Output stabilization with AVR system and EMI filters for the suppression of interference from the grid
- » Cold Start function in mains absence
- » LCD display
- » IEC sockets and adapter wire included
- » Communications: RS232 and USB
- » Monitoring and control software off (shutdown)
- » Self-diagnosis for battery and UPS operating state
- » Compatible with APFC equipment power without non power factor correction

ZGR STEADY LINE-INTERACTIVE UPS

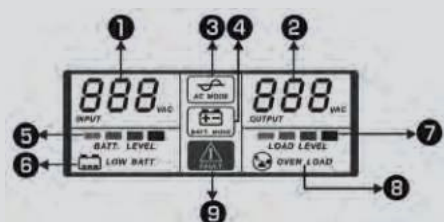

- | | |
|--------------------|-----------------------|
| 1 - Input voltage | 6 - Battery low alarm |
| 2 - Output voltage | 7 - Load level |
| 3 - Online mode | 8 - Overcharge alarm |
| 4 - Battery mode | 9 - General alarm |
| 5 - Battery level | |

TECHNICAL SPECIFICATIONS				
Model	ZGR STEADY 1000		ZGR STEADY 1500	ZGR STEADY 2000
Power	1000 VA / 700 W		1500 VA / 1050 W	2000 VA / 1400 W
INPUT ELECTRICAL CHARACTERISTICS				
Voltage range	170 - 280 Vac (allows use with generators) single phase			
Frequency	50 / 60 Hz ± 10 %			
OUTPUT ELECTRICAL CHARACTERISTICS				
Nominal voltage	220 / 230 / 240 Vac single phase			
Frequency (battery mode)	50 / 60 Hz ± 1 %			
Waveform (battery mode)	Pure sinewave			
Transfer time	Typical 2 - 6 ms / 10 ms max			
BATTERY				
Type / Capacity	2x 12 V / 7 Ah	2x 12 V / 9Ah	2x 12 V / 9Ah	
Charge time	6 - 8 h / 90 %			
Protection	Overload and deep discharge			
Autonomy	10 mins (depends on consumption and battery status)			
MONITORING				
Informative	LCD display			
Alarms	Acoustics depending on alarm			
Software	Windows / Linux / MAC			
CONNECTIONS				
Input	1 x IEC			
Output	4 x IEC	6 x IEC	6 x IEC	
Protection	Modem / LAN RJ45			
Communication	USB and RS232 (software monitoring)			
FUNCTIONS				
On/OFF with battery (Cold Start)	Yes (allows UPS to run without mains power)			
Auto Restart	Yes (restarts UPS functions after a failure or deep battery discharge)			
ENVIRONMENTAL AND MECHANICAL CHARACTERISTICS				
Cooling	Natural convection		Fan	
Operation temperature	0 - 40 °C			
Noise level (at 1 m)	< 45 dB		< 55 dB	
Relative humidity	0 - 95 % without condensation			
Dimensions (WxHxL)	148 x 160 x 350 mm	158 x 198 x 380 mm	158 x 198 x 380 mm	
Weight approx.	8,6 kg	11,5 kg	12,3 kg	
STANDARDS				
Marking	CE			
Directives	Low voltage directive: 2014/35/EU, EMC directive: 2014/30/EU			
Standards	Safety: EN 62040-1, EMC: EN 62040-2, Accordance: EN 62040-3			

Green Power design that minimizes self consumption during normal operation
 Battery charging system even with the UPS turned OFF
 These specifications may change without notice



FORMAT



TOWER

IEC 62040 - 3

VI
TYPE

ZGR TOWER PRO 1 - 3 KVA

ONLINE SINGLE-PHASE UPS



ZGR TOWER PRO

double conversion Online technology for maximum reliability and protection.

ZGR TOWER PRO uses double conversion Online technology that completely isolates mains voltage and frequency variations and interferences that may appear in the power grid, providing high-quality voltage and frequency to your devices.

They are tower format, include automatic self-test and three optimized battery charge levels, in addition to ECO Mode.

Ideal for business continuity applications that require long battery operation.

It is possible to extend the autonomy several hours using the LBT (Long Back up Time) model with a reinforced battery charger.



Applications



INDUSTRY



EMERGENCY



DOMESTIC USE



DATA CENTERS

Characteristics

- » Power factor of 0,9
- » Pure sinewave output
- » Intelligent Port for SNMP communications
- » Long autonomy models
- » 1, 2 and 3 kVA powers
- » 3-level intelligent charger
- » LCD display
- » ECO function with performance > 96 %
- » Cold Start and Auto Restart Function
- » Management and monitoring via software
- » Self-battery and UPS diagnosis of operating state
- » Double conversion online (Rectifier / Inverter)
It completely isolates customer loads from mains voltage, frequency and noise variations from the power grid.
- » Programmable output off function
Guarantees autonomy for priority loads.
- » Frequency conversion function

ZGR TOWER PRO ONLINE SINGLE-PHASE UPS

TECHNICAL SPECIFICATIONS			
Model	ZGR TOWER PRO		
Power	1000 VA / 900 W	2000 VA / 1800 W	3000 VA / 2700 W
Power factor	0,9		
INPUT ELECTRICAL CHARACTERISTICS			
Voltage range	160 - 300 Vac (allows use with generators) single phase		
Frequency	45 - 65 Hz (auto detecting)		
Power factor	> 0,98		
OUTPUT ELECTRICAL CHARACTERISTICS			
Nominal voltage	208 / 220 / 230 / 240Vac single phase		
Frequency (battery mode)	50 / 60 Hz ± 0,02 Hz		
Waveform (battery mode)	Pure sinewave		
THD harmonic distortion (100% load)	< 3 % linear / < 5 % non linear		
Transfer time	0ms battery / < 4 ms bypass		
Permissible peak current	3:1		
EFFICIENCY			
Inverter mode	Up to 92 %		
BATTERY			
Type / Capacity	24V / 9 Ah (36V -LBT)	48V / 9 Ah (72V -LBT)	72V / 9 Ah (96V -LBT)
Charge time	5 h / 90 %		
Protection	Overload and deep discharge		
Autonomy	10 min up to various hours (expandable with additional battery modules)		
MONITORING			
Informative	LED + LCD display		
Alarms	Acoustics depending on alarm		
Software	Windows / Linux / MAC		
CONNECTIONS			
Input	1x IEC / 1x Anderson (for long autonomy batteries)		
Output equipment internal battery	4x IEC (2 programmable)	8x IEC (4 programmable)	8x IEC (4 programmable)
Output LBT equipment	4x IEC (2 programmable)	4x IEC (2 programmable)	4x IEC (2 programmable)
Protection	Modem / LAN RJ45 (optional)		
Communication	USB and RS232 (software monitoring)		
Intelligent port	Yes (SNMP optional / dry contacts)		
FUNCTIONS			
On/OFF with battery (Cold Start)	Yes (allows UPS to run without mains power)		
Auto Restart	Yes (restarts UPS functions after a failure or deep battery discharge)		
Parallelable	No		
Frequency converter 50 - 60 Hz	Yes		
Programmable outputs	Yes		
ENVIRONMENTAL AND MECHANICAL CHARACTERISTICS			
Cooling	Forced fan cooling (PWM speed control)		
Operation temperature	0 - 40°C		
Noise level (at 1 m)	< 50dB		
Relative humidity	0 - 95 % without condensation		
Dimensions (WxHxL)	144 x 215 x 300 mm	191 x 335 x 470 mm	191 x 338 x 470 mm
Weight approx.	9,2 kg	19,5 kg	26,5 kg
Dimensions models long range (W x D x H)	144 x 215 x 300 mm	144 x 215 x 399 mm	144 x 215 x 399 mm
Weight approx. models long range	4,3 kg	6,4 kg	6,7 kg
STANDARDS			
Marking	CE		
Directives	Low voltage directive: 2014/35/EU, EMC directive: 2014/30/EU		
Standards	Safety: EN 62040-1, EMC: EN 62040-2, Accordance: EN 62040-3		

These specifications may change without notice



LBT models with customizable autonomy

FORMAT



TOWER

IEC 62040 - 3



ZGR TOWER PRO ONLINE SINGLE-PHASE UPS

ZGR TOWER PRO 6 - 10 KVA

ONLINE SINGLE-PHASE UPS



ZGR TOWER PRO

double conversion Online technology wants to protect your installation with maximum efficiency (PF1,0).

In this range of equipments there are 6 and 10 kVA available models with parallel technology of up to 4 units. This feature allows a gradual upgrade of user installation without the need to invest in a new UPS.

It also integrates the Frequency Converter function that enables to adapt the operating frequency in different countries 50 / 60 Hz.

Ideal for business continuity applications that require long battery operation.

It is possible to extend the autonomy several hours using the LBT versions with reinforced battery charger.



PF 1.0

Applications



INDUSTRY



EMERGENCY



DOMESTIC USE



DATA CENTERS



RAILWAY SECTOR

Characteristics

- » Power factor of 1,0
- » Parallelable up to 4 units
- » Can be configured as common battery
- » Pure sinewave output
- » SNMP communications card and dry contacts*
- » 3-level smart charger
- » LCD display
- » ECO function with performance > 96 %
- » Cold Start and Auto Restart function
- » Self battery and UPS diagnosis of operating state

* Optional

- » Double conversion online (Rectifier/Inverter)
It completely isolates customer loads from mains voltage, frequency and noise variations.
- » Long range models available
- » Management and monitoring
 - Via software
 - USB / RS232 connection
- » EPO function (Emergency Power OFF)
 - Rear panel terminal or front panel button
- » Frequency converter function

ZGR TOWER PRO ONLINE SINGLE-PHASE UPS

TECHNICAL SPECIFICATIONS		
Model	ZGR TOWER PRO 6	ZGR TOWER PRO 10
Power	6kVA / 6kW	10kVA / 10kW
Power factor	1,0	
INPUT ELECTRICAL CHARACTERISTICS		
Voltage range	165 - 276 Vac (allows use with generators) single phase	
Frequency	45 - 65 Hz (auto detecting)	
Power factor	0,99	
THDi (100% load)	< 3 % linear	
OUTPUT ELECTRICAL CHARACTERISTICS		
Nominal voltage	220 / 230 / 240 Vac single phase	
Frequency (battery mode)	50 / 60 Hz ± 0,02 Hz	
Waveform (battery mode)	Pure sinewave	
Harmonica distortion THD (100% load)	< 2 % linear / < 4 % non linear	
Transfer time	0 ms battery / 0 ms bypass	
Permissible peak current	3:1	
Overcharge	105..110 % 10 min. / 110..130 % 1 min. / ≥130% 0,2 sec.	
EFFICIENCY		
Inverter mode	Up to 93 %	
BATTERY		
Type / Capacity	12 V Pb / Depends on autonomy	
Charge time	6 - 8h / 90 %	
Protection	Overload / deep discharge / short-circuit / temperature	
Autonomy	10 mins up to several hours (extendable with additional battery modules)	
MONITORING		
Informative	LED + LCD display	
Alarms	Acoustics depending on alarm	
Software	Windows / Linux / MAC	
CONNECTIONS		
Input	Terminal panel	
Output	Terminal panel	
Communication	USB and RS232 (software monitoring)	
Intelligent port	Yes (SNMP optional / dry contacts)	
FUNCTIONS		
On/OFF with battery (Cold Start)	Yes (allows UPS to run without mains power)	
Auto Restart	Yes (restarts UPS functions after a failure or deep battery discharge)	
EPO Function (Emergency Power OFF)	Contacts in rear panel	
Parallelable	Yes (up to 4 units)	
Frequency converter 50-60Hz	Yes	
Programmable outputs	No	
ENVIRONMENTAL AND MECHANICAL CHARACTERISTICS		
Protection switches	Yes	
Cooling	Forced with fans (PWM speed control)	
Operation temperature	0 - 40 °C	
Noise level (at 1 m)	< 55 dB	
Relative humidity	0 - 95 % without condensation	
Dimensions (WxHxL)	191 x 720 x 483 mm	191 x 720 x 483 mm
Weight approx.	69 kg	77 kg
Dimensions for models long range (W x D x H)	191 x 330 x 410 mm	191 x 330 x 410 mm
Weight approx. for models long range	12 kg	12 kg
STANDARDS		
Marking	CE	
Directives	Low voltage directive: 2014/35/EU, EMC directive: 2014/30/EU	
Standards	Safety: EN 62040-1, EMC: EN 62040-2, Accordance: EN 62040-3	

These specifications may change without notice



LBT models with customizable autonomy

FORMAT



TOWER

IEC 62040 - 3



ZGR TOWER PRO ONLINE SINGLE-PHASE UPS

ZGR EFFICIENT RT 1 - 3 KVA

ONLINE SINGLE-PHASE UPS



always ON

PF 0.9

EFFICIENT RT in compact and convertible format Rack/Tower.

EFFICIENT RT are high density dual conversion Online UPS, adapted to power a wide range of devices such as servers, storage systems, VoIP telephone devices, network and medical systems, as well as industrial scope.

It is ideal to supply and protect Blade Server systems thanks to its high power factor. The height of only 2U makes the EFFICIENT RT range perfectly integrated into 19" rack cabinets.

ZGR has always been concerned about energy savings and has introduced in all UPS series the ECO function that minimizes consumption during normal operation and improves efficiency.



Applications



INDUSTRY



EMERGENCY



DOMESTIC USE



DATA CENTERS



RAILWAY SECTOR

Characteristics

- » Power factor of 0,9
- » Rack/tower format
- » SNMP communications cards and dry contacts
- » Long autonomy models
- » 1, 2 and 3 kVA models
- » Pure sinewave output
- » 3-level smart charger
- » LCD screen
- » Cold Start and Auto Restart function
- » Self battery and UPS status diagnosis
- » Frequency conversion function 50 Hz <-> 60 Hz
- » Management and monitoring
 - Via software
 - USB/RS232 connection
- » ECO function
 - Minimizes the UPS self consumption.
- » Outputs Off function
 - Power shedding function guarantees autonomy to priority
- » Double conversion online (Rectifier/Inverter)
 - It completely insulates the consumption of voltage, frequency and noise variations from the power grid.

ZGR EFFICIENT RT ONLINE SINGLE-PHASE UPS

TECHNICAL SPECIFICATIONS			
Model	ZGR EFFICIENT RT 1	ZGR EFFICIENT RT 2	ZGR EFFICIENT RT 3
Power	1000 VA / 900 W	2000 VA / 1800 W	3000 VA / 2700 W
Power factor	0,9		
INPUT ELECTRICAL CHARACTERISTICS			
Voltage range	162 - 290 Vac (allows use with generators) single phase		
Frequency	45 - 65 Hz (auto detecting)		
Power factor in input	> 0,99		
OUTPUT ELECTRICAL CHARACTERISTICS			
Nominal voltage	208 / 220 / 230 / 240 Vac single phase		
Frequency (battery mode)	50 / 60 Hz ± 0,02 Hz		
Waveform (battery mode)	Pure sinewave		
THD harmonic distortion (100% load)	< 3 % linear / < 5 % non linear		
Transfer time	0 ms battery / < 4 ms bypass		
Permissible peak current	3:1		
EFFICIENCY			
Inverter mode	Up to 90 %		
BATTERY			
Type / Capacity for standard models	24 V / 9 Ah (36 V -LBT)	48 V / 9 Ah (72 V -LBT)	72 V / 9 Ah (96 V -LBT)
Hot Swap	Yes ⁽¹⁾		
Charge time	5 h / 90 % (from a full discharge)		
Protection	Overload and deep discharge		
Autonomy	10 mins up to several hours (extendable with additional battery modules)		
MONITORING			
Informative	LED + LCD display		
Alarms	Acoustics depending on alarm		
Software	Windows / Linux / MAC		
CONNECTIONS			
Input	1x IEC / 1x Anderson (long models LBT autonomy)		
Output	Up to 4+4 IEC (4 IEC with programmable output)		
Protection	Modem / LAN RJ45		
Communication	USB and RS232 (software monitoring)		
Intelligent port	Yes (SNMP optional / dry contacts)		
FUNCTIONS			
On/OFF with battery (Cold Start)	Yes (allows UPS to run without mains power)		
Auto Restart	Yes (restarts UPS functions after a failure or deep battery discharge)		
Parallelable	No		
Frequency converter 50-60Hz	Yes		
Programmable outputs	Yes		
ENVIRONMENTAL AND MECHANICAL CHARACTERISTICS			
Rack mounting guides	Optional		
Cooling	Forced with fans (PWM speed control)		
Operation temperature	0 - 40 °C		
Noise level (at 1 m)	< 50 dB		
Relative humidity	0 - 95 % without condensation		
Dimensions for long-range models (WxHxD)	440 x 86,5 x 325 mm	440 x 86,5 x 460 mm	440 x 86,5 x 600 mm
Weight approx. for standard models	11,3 kg	19,1 kg	24,4 kg
Dimensions for long-range models (WxHxD)	440 x 86,5 x 325 mm	440 x 86,5 x 435 mm	440 x 86,5 x 435 mm
Weight approx. for models long range	5,6 kg	8,3 kg	8,6 kg
STANDARDS			
Marking	CE		
Directives	Low voltage directive: 2014/35/EU, EMC directive: 2014/30/EU		
Standards	Safety: EN 62040-1, EMC: EN 62040-2, Accordance: EN 62040-3		



⁽¹⁾ Battery easily replaceable by the user
Vertical mounting available
These specifications may change without notice

IEC 62040 - 3



ZGR EFFICIENT RT ONLINE SINGLE-PHASE UPS

ZGR EFFICIENT R 6 - 10 KVA

ONLINE SINGLE-PHASE UPS



always ON

PF 1.0

ZGR EFFICIENT R

maximum efficiency supply
for critical systems with.
Rack/Tower Convertible.

The ZGR EFFICIENT R range goes one step further, looking to meet the needs of customers with greater demand for protected power in their 6 and 10 kVA versions, providing the best power solution for vital applications and critical devices that require maximum reliability and efficiency thanks to its 1,0 Power Factor and up to 93% efficiency.

It also supports parallel of up to 4 units for greater versatility and a growth according to the evolution of consumption of its installation.

Perfect for protecting industrial applications, servers, banks, IT equipment and networks.



Applications



INDUSTRY



EMERGENCY



DOMESTIC USE



DATA CENTERS



RAILWAY SECTOR

Characteristics

- » Power factor of 1,0
- » Parallelable up to 4 units
- » Common battery configurable
- » Communications card and dry contacts*
- » Pure sinewave output
- » Efficiency up to 93%
- » 3-level smart charger
- » LCD display
- » Cold Start and Auto Restart function
- » Frequency converter function

* Optional

- » Management and monitoring
 - Via software
 - USB/RS232 connection
- » EPO function (Emergency Power OFF)
 - By contact on the rear panel or button on the front.
- » ECO function
 - Minimizes UPS's own consumption for non-critical applications.
- » Auto diagnosis of battery and UPS operating state
- » Double conversion online

ZGR EFFICIENT R ONLINE SINGLE-PHASE UPS

TECHNICAL SPECIFICATIONS		
Model	ZGR EFFICIENT R 6	ZGR EFFICIENT R 10
Power	6 kVA / 6 kW	10 kVA / 10 kW
Power factor	1,0	
Format	Rack	
INPUT ELECTRICAL CHARACTERISTICS		
Voltage range	120 - 276 Vac (allows use with generators) single phase	
Frequency	45-65 Hz (auto detecting)	
Power factor in input	0,99	
THDi (100 % load)	< 3 % linear, < 5 % non linear	
OUTPUT ELECTRICAL CHARACTERISTICS		
Nominal voltage	208 / 220 / 230 / 240 Vac single phase	
Frequency (battery mode)	50 / 60 Hz ± 0,01 Hz	
Waveform (battery mode)	Pure sinewave	
THD harmonic distortion (100 % load)	< 3 % linear / < 5 % non linear	
Transfer time	0ms battery / 0ms bypass	
Permissible peak current	3:1	
Overcharge	105..110% - 10 min. / 110..130% - 1 min. / ≥ 130% 1 sec.	
EFFICIENCY		
Inverter mode	Up to 93%	
BATTERY		
Battery voltage	192 / 216 / 240 V (selectable)	
Hot Swap	Yes (battery pack)	
Charge time	6 - 8 h / 90% (from a full discharge)	
Protection	Overload / Deep discharge / shor circuit / temperature	
Autonomy	10 min up to various hours (expandable with additional battery modules)	
MONITORING		
Informative	LED + LCD display	
Alarms	Acoustics depending on alarm	
Software	Windows / Linux / MAC	
CONNECTIONS		
Input	Terminal panel	
Output	Terminal panel	
Communication	USB, RS232	
Intelligent port	Yes (SNMP card / dry contacts)	
FUNCTIONS		
On/OFF with battery (Cold Start)	Yes (allows UPS to run without mains power)	
Auto Restart	Yes (restarts UPS functions after a failure or deep battery discharge)	
EPO Function (Emergency Power OFF)	Contacts in rear panel	
Parallelable	Yes (up to 4 units)	
Frequency converter 50-60Hz	Yes	
ENVIRONMENTAL AND MECHANICAL CHARACTERISTICS		
Protection switches	Yes	
Cooling	Forced with fans (PWM speed control)	
Operation temperature	0 - 40 °C	
Noise level (at 1 m)	< 55 dB	
Relative humidity	0 - 95% without condensation	
Dimensions (WxHxL)	440 x 88 x 675 mm	440 x 88 x 675 mm
Weight approx.	14 kg	18 kg
STANDARDS		
Marking	CE	
Directives	Low voltage directive: 2014/35/EU, EMC directive: 2014/30/EU	
Standards	Safety: EN 62040-1, EMC: EN 62040-2, Accordance: EN 62040-3	



Vertical or horizontal mounting available
These specifications may change without notice

IEC 62040 - 3



ZGR EFFICIENT R ONLINE SINGLE-PHASE UPS

ZGR VERSATILE 10 - 20 KVA

ONLINE THREE-PHASE UPS



PF 1.0

ZGR VERSATILE 3:1 1:1

it's our three-phase –
single-phase flexible bet

The ZGR VERSATILE series consists of a transformer-free SAI, in tower format and available in 10 – 15 - 20 kVA models with three-phase / single-phase input and single-phase output.

ZGR VERSATILE incorporates the most advanced technologies in DSP (digital signal processor), three-tier inverter circuit and maximum protection to critical loads, always optimizing energy savings.

This series anticipates the evolution of its single-phase installation to larger powers and the future need to switch to a three-phase network. Extends the service life of your single-phase installation by reducing costs.

It is an ideal equipment to protect industrial processes, data centers, transportation, emergencies and safety.



Applications



INDUSTRY



EMERGENCY



DATA
CENTERS



RAILWAY
SECTOR



SECURITY

Characteristics


- » Power factor of 1,0
- » Convertible 3:1 / 1:1
- » Parallelable up to 4 units
- » Online double conversion with DSP control
- » Low current distortion
- » LBT models with customizable autonomy
- » "Green Concept" design for energy saving
- » Compatible with generators sets
- » Configurable battery voltage
- » Allows common battery configuration in parallel equipments
- » Estimated battery life time on display
- » Bay for Smart Cards: SNMP, dry contacts
- » Communication software included
- » Startup Cold Start
 - It allows the UPS to be put into operation even without power supply.
- » ECO function
 - Minimizes UPS's own consumption and improves efficiency by up to 98 %
- » Double conversion online

ZGR VERSATILE Online Three-phase UPS

TECHNICAL SPECIFICATIONS			
Model	ZGR VERSATILE 10	ZGR VERSATILE 15	ZGR VERSATILE 20
Power	10 kVA / 10 kW	15 kVA / 15 kW	20 kVA / 20 kW
Power factor	1,0		
Format	Tower		
INPUT ELECTRICAL CHARACTERISTICS			
Voltage range	120 - 276 Vac single phase / 205 - 478 Three-phase Vac		
Frequency	40 - 70 Hz (auto detecting)		
Power factor in input	0,99		
THDi (100 % load)	< 5 % non linear		
OUTPUT ELECTRICAL CHARACTERISTICS			
Nominal voltage	220 / 230 / 240 Vac single phase		
Frequency (battery mode)	50 / 60 Hz ± 0,2 Hz		
Waveform (battery mode)	Pure sinewave		
THD harmonic distortion (100 % load)	< 2 % linear / < 5 % non linear		
Transfer time	0 ms battery / 0 ms bypass		
Permissible peak current	3:1		
Overcharge (Online)	<110% - 60 min. / <125% - 10 min. / <150% - 1 min. / ≥ 150% 0,2 sec.		
Overcharge (Battery)	105..110% - 10 min. / 110..130% - 1 min. / ≥ 150% 0,2 sec.		
EFFICIENCY			
Inverter mode	Up to 93,5 %		
BATTERY			
Maximum charger current	14 A	16 A	18 A
Battery bus voltage	192 / 216 / 240 Vdc (selectable) ⁽¹⁾		
Autonomy	Customizable according to battery capacity		
MONITORING			
Informative	Intuitive display TFT 2,4" color		
Alarms	Acoustics depending on alarm (optional potential-free contacts)		
Software	Windows		
CONNECTIONS			
Terminal panel	Input / Output / Battery		
Protection switch	Input / Output / Maintenance bypass		
Separate bypass input (Dual input)	No		
Communication	USB / RS232		
Intelligent port	Yes (SNMP optional / dry contacts)		
FUNCTIONS			
On/OFF with battery (Cold Start)	Yes (allows UPS to run without mains power)		
Auto Restart	Yes (restarts UPS functions after a failure or deep battery discharge)		
ECO mode	Yes		
EPO Function (Emergency Power OFF)	Contacts in rear panel		
Parallelable	Yes (up to 4 units)		
Bypass operation limits	Configurable		
Frequency converter 50 - 60 Hz	Yes		
ENVIRONMENTAL AND MECHANICAL CHARACTERISTICS			
Operation temperature	0 - 40°C		
Cooling	Forced with fans (PWM speed control)		
Noise level (at 1m)	< 60 dB		
Relative humidity	0 - 95 % without condensation		
Dimensions (WxHxL)	250 x 660 x 600 mm		
Weight approx.	33,5 kg	45 kg	48 kg
STANDARDS			
Marking	CE		
Directives	Low voltage directive: 2014/35/EU, EMC directive: 2014/30/EU		
Standards	Safety: EN 62040-1, EMC: EN 62040-2, Accordance: EN 62040-3		



(1) The number of batteries may affect the output PF
These specifications may change without notice

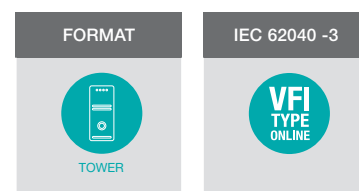

ZGR VERSATILE R 10 KVA

ONLINE THREE-PHASE UPS



ZGR VERSATILE R 3:1 1:1

is our flexible three-phase / single-phase bet.
Convertible Rack/Tower.

ZGR VERSATILE R is our bet on 10 kVA power and Rack format (3U) that best suits your space limitations and also allows its integration into 19" cabinet.

The ZGR VERSATILE R series seeks to optimize your investment in a UPS and, among other possible functionalities, allows connection to both single-phase and future expansion to three-phase grid.

It is designed for paralleling up to 4 units to enable a gradual upgrade according to your protected power needs thanks to Double Conversion technology and a high efficiency up to 93,5%.



Applications



INDUSTRY



EMERGENCY



DATA
CENTERS



RAILWAY
SECTOR



SECURITY

Characteristics

- » Power factor of 1,0
- » Convertible 3:1 / 1:1
- » Parallelable up to 4 units
- » Online double conversion with DSP control
- » Intuitive display TFT 2,4" color
- » Low current distortion
- » Customizable autonomy
- » Compatible with generators sets
- » Periodic battery test configurable
- » Possibility of sharing same batteries in parallel equipment
- » Estimated battery life time on display
- » Connection terminals on rear panel
- » Cold Start
 - It allows UPS operation even without mains power
- » ECO function
 - Minimizes UPS self-consumption and improves efficiency
- » Communications
 - Smart cards bay: SNMP, dry contacts
 - Communication software included

ZGR VERSATILE R Online Three-phase UPS

TECHNICAL SPECIFICATIONS	
Model	ZGR VERSATILE R
Power	10kVA / 10kW
Power factor in input	1,0
Format	Rack
INPUT ELECTRICAL CHARACTERISTICS	
Voltage range	120 - 276 Vac single phase / 208 - 478 Three-phase Vac
Frequency	40 - 70Hz (auto detecting)
Power factor in input	0,99
THDi (100 % load)	< 5 % non linear
OUTPUT ELECTRICAL CHARACTERISTICS	
Nominal voltage	220 / 230 / 240 Vac single phase
Frequency (battery mode)	50 / 60 Hz \pm 0,2 Hz
Waveform (battery mode)	Pure sinewave
THD harmonic distortion (100 % load)	< 2 % linear / < 5 % non linear
Transfer time	0 ms battery / 0 ms bypass
Permissible peak current	3:1
Overcharge (Online)	<110% - 60 min. / <125% - 10 min. / <150% - 1 min. / \geq 150% 0,2 sec.
Overcharge (Battery)	105..110% - 10 min. / 110..130% - 1 min. / \geq 130% 0,2 sec.
EFFICIENCY	
Inverter mode	Up to 93,5 %
BATTERY	
Maximum charger current	14 A
Battery bus voltage	192 / 216 / 240 Vdc (selectable) ⁽¹⁾
Autonomy	Customizable according to battery capacity
MONITORING	
Informative	Intuitive display TFT 2,4" color
Alarms	Acoustics depending on alarm (optional potential-free contacts)
Software	Windows
CONNECTIONS	
Terminal panel	Input / Output / Battery
Protection switch	Optional (module PDU distribution)
Separate bypass input (Dual input)	No
Communication	RS232
Intelligent port	Yes (optional SNMP / dry contact)
FUNCTIONS	
On/OFF with battery (Cold Start)	Yes (allows UPS to run without mains power)
Auto Restart	Yes (restarts UPS functions after a failure or deep battery discharge)
ECO mode	Yes
EPO Function (Emergency Power OFF)	Contacts in rear panel
Parallelable	Yes (up to 4 units)
Performance limit bypass	Configurable
Frequency converter 50 - 60 Hz	Yes
ENVIRONMENTAL AND MECHANICAL CHARACTERISTICS	
Cooling	Forced with fans (PWM speed control)
Operation temperature	0 - 40°C
Noise level (at 1 m)	< 55 dB
Relative humidity	0 - 95 % without condensation
Dimensions (WxHxL)	440 x 131 x 580 mm
Weight approx.	30 kg
STANDARDS	
Marking	CE
Directives	Low voltage directive: 2014/35/EU, EMC directive: 2014/30/EU
Standards	Safety: EN 62040-1, EMC: EN 62040-2, Accordance: EN 62040-3



(1) The number of batteries may affect the output PF
These specifications may change without notice

IEC 62040 -3



ZGR VERSATILE R Online Three-phase UPS

ZGR INFLUENCE 10 – 40 KVA

ONLINE THREE-PHASE UPS



ZGR INFLUENCE 3:3

advanced and compact
three-phase technology
with efficiency of up to
94,5%.

PF 0.9

ZGR INFLUENCE consists of a small size UPS, in tower format and available in 10, 15, 20, 30 and 40 kVA models with three-phase input and output.

The ZGR INFLUENCE series incorporates the most advanced DSP technologies (digital signal processor), 3-level intelligent charger and a 7" colour touch screen display, where the UPS status in an intuitive way and direct without the need for external software.

It is parallelable up to 4 units common battery setup and thus occupying a small footprint, being one of the solutions with the smallest dimensions on the market.

Special configurations consult.



Applications



INDUSTRY



EMERGENCY



DATA
CENTERS



RAILWAY
SECTOR



SECURITY

Characteristics

- » Power factor of 0,9
- » Dual input*
- » Efficiency up to 94,5 %
- » Parallelable up to 4 units
- » Possibility of sharing same batteries in parallel equipment
- » Graphic display 7" TFT colour touch screen
- » Compatible with generator sets
- » Compatible with NiCd / Li (on request)
- » Internal batteries*
- » Online double conversion with DSP control
- » Low current distortion
- » Possibility of long autonomies
- » Configurable periodic battery test
- » Configurable battery voltage
- » Cold Start and Auto Restart function
- » 2 independent bays for smart cards and dry contacts alarms
- » Integrated input / output / bypass MCB protections


* *Optional*

ZGR INFLUENCE Online Three-phase UPS

TECHNICAL SPECIFICATIONS					
Model	ZGR INFLUENCE 10	ZGR INFLUENCE 15	ZGR INFLUENCE 20	ZGR INFLUENCE 30	ZGR INFLUENCE 40
Power	10kVA / 9kW	15kVA / 13,5kW	20kVA / 18kW	30kVA / 27kW	40kVA / 36kW
Power factor	0,9				
Format	Tower				
INPUT ELECTRICAL CHARACTERISTICS					
Voltage range	208 - 478 Vac (allows use with generators) 3 phases + N + PE				323 - 478 Vac
Frequency	45 - 65 Hz (auto detecting)				
Power factor in input	0,99				
THDi (100 % load)	< 3 % non linear				
OUTPUT ELECTRICAL CHARACTERISTICS					
Nominal voltage	380 / 400 / 415 Vac (3 phases + N + PE) ± 1 %				
Frequency (battery mode)	50 / 60Hz ± 0,1 Hz				
Waveform (battery mode)	Pure sinewave				
THD harmonic distortion (100 % load)	< 2 % linear / < 4 % non linear				
Transfer time	0 ms battery / 0 ms bypass				
Permissible peak current	3:1				
Overcharge (Online)	60 mins < 110%, 10 mins < 125%, bypass >150%				
Overcharge (Battery)	10 mins < 110%, 1 mins < 125%, off > 150 %				
EFFICIENCY					
Inverter mode	Up to 93,5 %			Up to 94,5 %	
BATTERY					
Maximum charger current	10A	10A	10A	20A	20A
DC bus voltage	192 / 216 / 240 Vdc				384 - 480 Vdc
Autonomy	Customizable from 5 minutes to several hours (depends on the battery capacity)				
MONITORING					
Informative	LED + 7" colour touch screen				
Alarms	Acoustics depending on alarm (optional potential-free contacts)				
Software	Windows				
CONNECTIONS					
Terminal panel	Input / Output / Bypass / Battery				
Protection switch	Input / Output / Bypass			Input	
Bypass Maintenance switch (MCB)	20A	32A	40A	63A	80 A
Bypass input (Dual input)	No (optional)				
Communication	USB / RS232 / RS485 (no simultaneously)				
Intelligent port	2 bays (optional SNMP / dry contact)				
FUNCTIONS					
On/OFF with battery (Cold Start)	Yes (allows UPS to run without mains power)				
Auto Restart	Yes (restarts UPS functions after a failure or deep battery discharge)				
ECO mode	Yes				
EPO Function (Emergency Power OFF)	Rear panel terminals				
Parallelable	Yes (up to 4 units)				
Performance limit bypass	Configurable				
Frequency converter 50 - 60Hz	Yes				
ENVIRONMENTAL AND MECHANICAL CHARACTERISTICS					
Cooling	Forced with fans (PWM speed control)				
Operation temperature	0 - 40 °C				
Noise level (at 1 m)	< 55 dB				< 58 dB
Relative humidity	0 - 95 % without condensation				
Dimensions (WxHxL)	250 x 878 x 880 mm				
Weight approx.	57 kg	63 kg	65 kg	71 kg	73 kg
STANDARDS					
Marking	CE				
Directives	Low voltage directive: 2014/35/EU, EMC directive: 2014/30/EU				
Standards	Safety: EN 62040-1, EMC: EN 62040-2, Accordance: EN 62040-3				



These specifications may change without notice

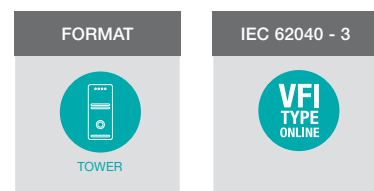

ZGR INFLUENCE HP 50 - 200 KVA

ONLINE THREE-PHASE UPS



ZGR INFLUENCE HP 3:3

advanced and efficient
three-phase technology
up to 95,5%.

ZGR INFLUENCE HP expands options with a range from 50 kVA to 200 kVA and improves its technology with a 3-stage inverter, which results in a lower power loss in conversion and achieves an efficiency of up to 95,5%.

Great efficiency for this series of small UPS.

In this power range, ZGR INFLUENCE HP offers an FP 1,0 for your consumption which makes it suitable for all types of installations that demand high energy quality and seek the best energy efficiency.

It is an ideal equipment to protect industrial processes, hospitals, data centers, transportation, emergencies and security.

They are available in Dual input version that allows a three-phase auxiliary bypass grid.

PF 1.0

HP 50 - 60



HP 80 - 200



Applications



INDUSTRY



EMERGENCY



DATA
CENTERS



RAILWAY
SECTOR



SECURITY



Characteristics

- » 3:3 and optional double input
- » Efficiency of 95,5 %
- » Parallelable up to 4 units
- » Possibility of sharing same batteries in parallel equipment
- » Compatible with NiCd / Li (on request)
- » Online double conversion with DSP control
- » Low current distortion
- » Possibility of long autonomies
- » Compatible with generators sets
- » Configurable battery voltage
- » Cold Star and Auto Restart function
- » Integrated input/output/bypass MCB protections
- » Double conversion online (Rectifier/Inverter)
 - Completely insulates the consumption of voltage, frequency and noise variations from the power grid
- » ECO function
 - Minimizes UPS's self-consumption and improves performance
- » Communications
 - 2 independent bays for smart cards and dry contacts alarms
 - Communication software included
- » Grid Backup Function
 - Allows 2 groups in parallel with 2 independent three-phase grids

ZGR INFLUENCE HP Online Three-phase UPS

TECHNICAL SPECIFICATIONS							
Model	INFLUENCE HP 50	INFLUENCE HP 60	INFLUENCE HP 80	INFLUENCE HP 100	INFLUENCE HP 120	INFLUENCE HP 150	INFLUENCE HP 200
Power	50 kVA / 50 kW	60 kVA / 60 kW	80 kVA / 80 kW	100 kVA / 100 kW	120 kVA / 120 kW	150 kVA / 150 kW	200 kVA / 200 kW
Power factor	1,0						
Format	Tower / Cabinet						
INPUT ELECTRICAL CHARACTERISTICS							
Voltage range	305 - 485 Vac (allows use with generators) 3 phases + N + PE						
Frequency	40 - 70 Hz (auto detecting)						
Power factor	0,99						
THDi (100 % load)	< 3 % non linear						
OUTPUT ELECTRICAL CHARACTERISTICS							
Nominal voltage	380 / 400 / 415 Vac (3 phases + N + PE) ± 1 %						
Frequency (battery mode)	50 / 60 Hz ± 0,1 Hz						
Waveform (battery mode)	Pure sinewave						
THD harmonic distortion (100 % load)	< 1 % linear / < 3 % non linear						
Transfer time	0 ms battery / 0 ms bypass						
Permissible peak current	3:1						
Overcharge (Online)	<110% - 60 min. / <125% - 10 min. / 150% 1 min.						* Consultar
EFFICIENCY							
Inverter mode	Up to 96 %						
BATTERY							
Maximum charger current	20 A		40 A			60 A	
DC bus voltage	384 - 600 Vdc						
Temperature sensor	External sensor (optional)						
Autonomy	Customizable from 5 minutes to several hours (depends on the battery capacity)						
MONITORING							
Informative	7" colour TFT touch screen						
Alarms	Acoustics depending on alarm (optional potential-free contacts)						
Software	Windows						
CONNECTIONS							
Terminal panel	Input / Output / Bypass / Battery						
Protection switch	Input / Output / Bypass						
Bypass Maintenance switch (MCB)	100 A	125 A	200 A	200 A	250 A	320 A	320 A
Bypass input (Dual input)	Yes (principal + bypass)						
Communication	USB / RS232 / RS485 (no simultaneously)						
Intelligent port	2 bays (optional SNMP / optional dry contact)						
FUNCTIONS							
On/OFF with battery (Cold Start)	Yes (allows UPS to run without mains power)						
Auto Restart	Yes (restarts UPS functions after a failure or deep battery discharge)						
ECO mode	Yes						
Emergency Power Off function (EPO)	Rear panel terminals						
Parallelable	Yes (up to 4 units)						
Master/Slave function (LBS)	It enables grouping parallels Master / Slave and control the network switch (STS)						
Bypass operation limits	Configurable						
Frequency converter 50 - 60Hz	Yes						
ENVIRONMENTAL AND MECHANICAL CHARACTERISTICS							
Cooling	Forced with fans (PWM speed control)						
Operation temperature	0 - 40 °C						
Noise level (at 1 m)	< 58 dB	< 60 dB	< 61 dB	< 63 dB	< 63 dB	< 66 dB	< 68 dB
Relative humidity	0 - 95 % without condensation						
Dimensions (WxHxL)	250 x 875 x 880 mm		442 x 1200 x 850 mm			442 x 1200 x 850 mm	
Weight approx.	80 kg	83 kg	144 kg	147 kg	155 kg	190 kg	230 kg
STANDARDS							
Marking	CE						
Directives	Low voltage directive: 2014/35/EU, EMC directive: 2014/30/EU						
Standards	Safety: EN 62040-1, EMC: EN 62040-2, Accordance: EN 62040-3						

These specifications may change without notice

FORMAT	IEC 62040 - 3
 TOWER	 VFI TYPE ONLINE

ZGR SCALABLE 60 – 300 KVA

ONLINE MODULAR UPS



La gama **ZGR SCALABLE 3:3** allows to easily increase power and autonomy to meet the changing needs of the end user.

PF 1.0

ZGR SCALABLE is the most advanced modular UPS, specially designed for data centers and critical loads offering maximum availability.

The MPW grows as the demand for the activity increases, without the need to expand the physical volume of the UPS, optimizing both the initial investment as well as the total costs of ownership.

ZGR SCALABLE expanding its feeding capacity is really easy thanks to modules of different powers*.

ZGR SCALABLE fully satisfies the changing demand of the grid environment and enables the end user to easily increase the power within its 3 available cabinet sizes.

* Optional



ZGR Scalable 60K

Applications



DATA
CENTERS

Characteristics

- » 10 k / 15 k / 20 k / 25 k / 30 k modules*
- » Centralized control
- » Parallel n+x
- » 3-level IGBT Technology
- » 3 - levels smart charging
- » Touch Screen
- » Power factor up to 1,0
- » Efficiency up to 95,5%
- » 2U module height
- » High MTBF and MTTR
- » Emergency Power Off (EPO)
- » Configurable battery voltage (360-600 Vdc)
- » Grid Backup function (BackFeed)
- » Low harmonic distortion THDI

* Optional

ZGR SCALABLE ONLINE MODULAR UPS

TECHNICAL SPECIFICATIONS			
Model	ZGR SCALABLE 60k	ZGR SCALABLE 150k	ZGR SCALABLE 300k
Power	10 - 60kVA / 10 - 60kW	10 -150kVA / 10 - 150 kW	10 -300kVA / 10 - 300kW
Cabinet	Up to 60k	Up to 150k	Up to 300k
Modules	10 k / 15k / 20k / 25 k / 30k		
Power factor	1,0		
Format	Cabinet		
INPUT ELECTRICAL CHARACTERISTICS			
Voltage range	305 - 485 Vac (allows use with generators) 3 phases + N + PE		
Frequency	40 - 70Hz (auto detecting)		
Power factor	0,99		
THDi (100 % load)	< 3 % non linear		
OUTPUT ELECTRICAL CHARACTERISTICS			
Nominal voltage	380 / 400 / 415 Vac (3 phases + N + PE) ± 1 %		
Frequency (battery mode)	50 / 60 Hz ± 0,1 %		
Waveform (battery mode)	Pure sinewave		
THD harmonic distortion (100 % load)	< 2 % linear / < 4 % non linear		
Transfer time	0 ms battery / 0 ms bypass		
Permissible peak current	3:1		
Overcharge (Online)	10 mins < 110%, 1 mins < 130%, bypass > 150%		
EFFICIENCY			
Inverter mode	Up to 95,5%		
BATTERY			
DC bus voltage	360 - 600 Vdc *		
Charger maximum current	18 A (per module)		
Autonomy	Depending on battery capacity		
MONITORING			
Informative	LED + LCD color 7" touch screen		
Alarms	Acoustics depending on alarm (optional potential-free contacts)		
Software	Windows		
CONNECTIONS			
Terminal panel	Input / Output / Bypass / Battery		
Protection switch	Input / Output / Bypass / Battery		
Bypass Maintenance switch (MCB)	125A	200 - 250 A	500 - 600 A
Bypass input	Yes		
Intelligent port	Yes (optional SNMP / RS485 / CAN / dry contact)		
FUNCTIONS			
On/OFF with battery (Cold Start)	Yes (allows UPS to run without mains power)		
EPO Function (Emergency Power OFF)	Push button / front panel contacts		
Parallelable	Yes (up to 4 units with parallel control N + x)		
Frequency converter 50-60Hz	Yes		
Battery temperature sensor	Yes (Optional)		
ENVIRONMENTAL AND MECHANICAL CHARACTERISTICS			
Cooling	Forced with fans (PWM speed control)		
Operation temperature	0 - 40 °C		
Relative humidity	0 - 95 % without condensation		
Noise level (at 1 m)	< 58 dB	< 61 dB	< 68 dB
Dimensions Cabinet (WxHxD)	600 x 1200 x 850 mm	600 x 1200 x 850 mm	600 x 2000 x 850 mm
Weight approx. Cabinets	142 kg	153 kg	295 kg
Dimensions Modules (WxHxD)	440 x 86 x 620 mm		
Weight approx. Modules	21 kg		
STANDARDS			
Marking	CE		
Directives	Low voltage directive: 2014/35/EU, EMC directive: 2014/30/EU		
Standards	Safety: EN 62040-1, EMC: EN 62040-2, Accordance: EN 62040-3		



*The PF may vary depending on the number of battery elements
These specifications may change without notice*

IEC 62040 - 3





ACCESSORIES U P S

ZGR ACCESSORIES - COMMUNICATIONS



ZGR 310391
SNMP card, Modbus TCP - MINI
Compatibility:
TOWER PRO / EFFICIENT



ZGR 310392
SNMP card, Modbus TCP - MINI PRO
Compatibility:
TOWER PRO / EFFICIENT



ZGR 310393
SNMP card, Modbus TCP - STD
Compatibility:
VERSATILE / VERSATILE R
INFLUENCE / SCALABLE



ZGR 310394
SNMP card, Modbus TCP/RTU - STD PRO
Compatibility:
VERSATILE / VERSATILE R
INFLUENCE / SCALABLE





ZGR 310395 / ZGR 310441
Relay card 1 Input / 6 Output - MINI
Compatibility:
TOWER PRO / EFFICIENT



ZGR 310396
Relay card 1 Input / 6 Output - STD
Compatibility:
VERSATILE / VERSATILE R
INFLUENCE / SCALABLE



ZGR 310397
Rack assembly guide
Compatibility:
EFFICIENT / VERSATILE R

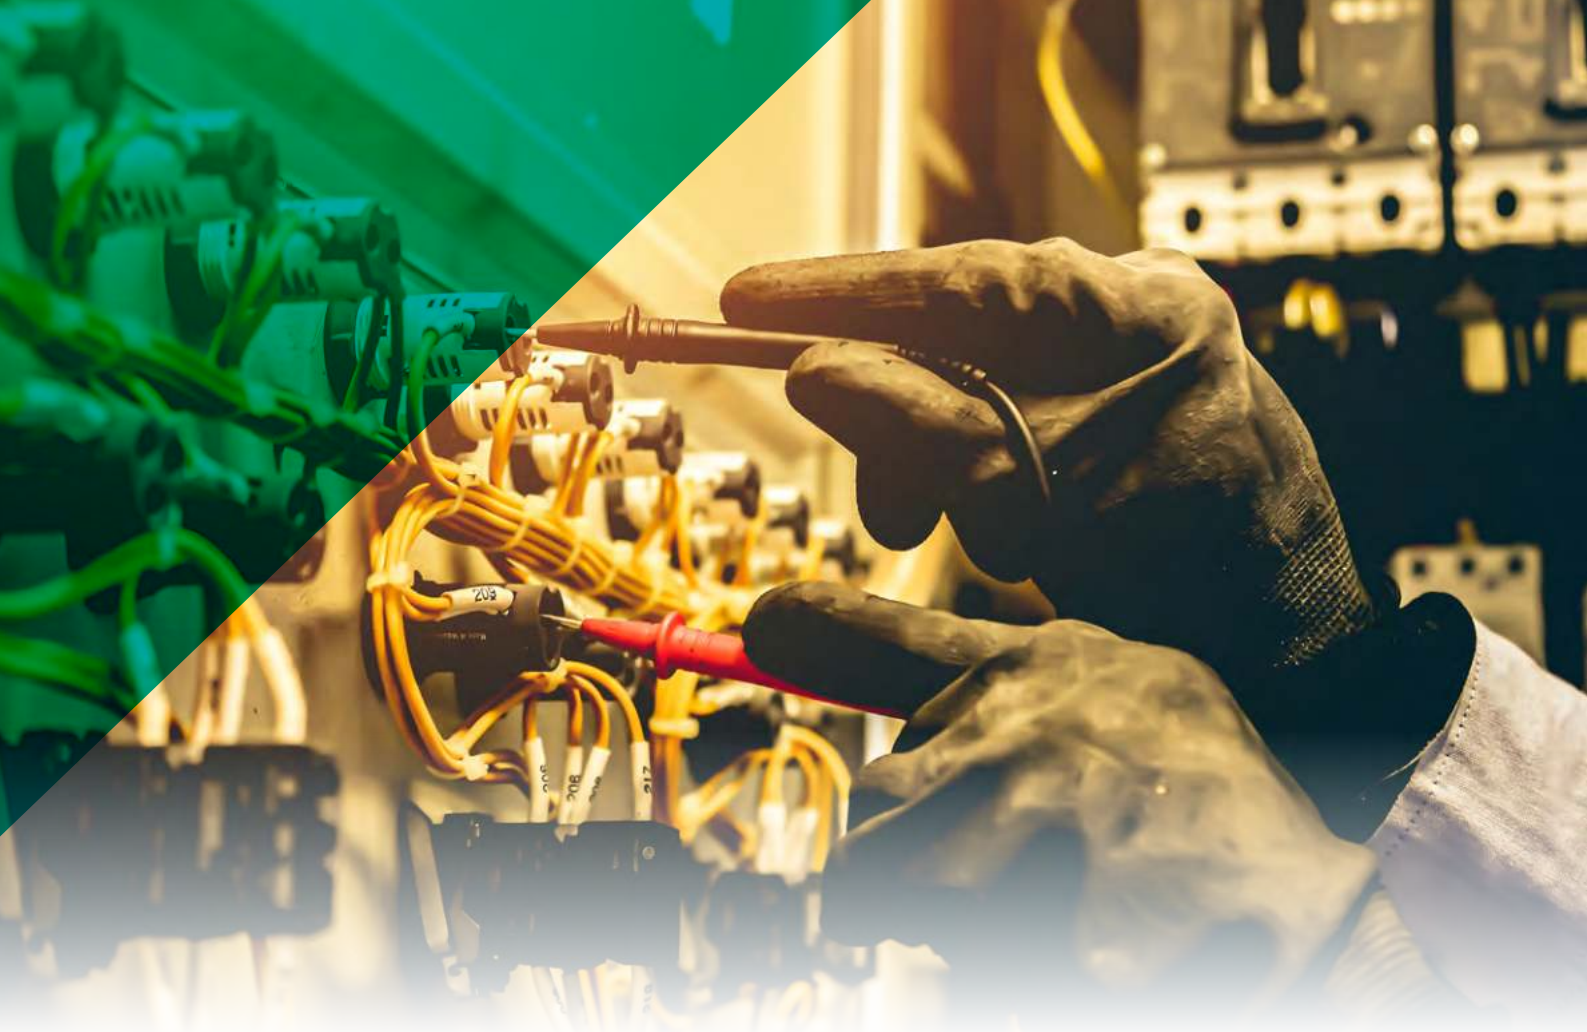

MAINTENANCE AND SERVICES

From our **ZIGOR Maintenance and Services (ZMS)** department we provide support to our customers under a concept of **Integral Supply Management**, from the development of technological solutions, maintenance and global service. We accompany our customers throughout the life cycle of the equipment, ensuring continuous operation, without incidents due to component degradation, and adding the new technologies developed to systems already installed.

Furthermore, we are aware that a correct and efficient preventive maintenance of the equipment will result in a reduction of costs due to breakdowns and in a better quality of service to our customers. For this reason, **ZIGOR** offers the possibility of benefiting from quality technical support and advice through different formulas.

Likewise at **ZIGOR** we are committed to the fast and efficient supply of the necessary components to avoid the loss of availability in our customers' installations. We have a stock of critical materials and components throughout all our facilities worldwide in order to reduce response times and costs for our customers.

ZIGOR MAINTENANCE AND SERVICES - ZMS

The service we offer gives you the possibility of benefiting from technical support and advice from a team of accredited professionals. To guarantee the success, we analyse the needs of the customer's facilities, develop the appropriate technological solution, and offer an efficient after-sales service.

1. Audits



This **analytical support**, together with the personalised study of new ideas, products and projects (R&D), will help you find the ideal protection for your critical energy systems, guaranteeing the continuity of your operations.

The final objective is to reduce operating costs and impact on the productivity of your company.

2. Study and analysis of electrical grid quality



ZIGOR offers a complete set of solutions to provide excellent energy quality for the supply of industrial processes. The problems of energy quality are of very diverse nature and an **adequate characterization** of these is essential to optimize the operational performance and economic profitability of the installation avoiding excessive and inefficient investments. The deep knowledge accumulated in this area by the technical service team together with the **ZIGOR** engineering team allows us to offer the best solution to our customers after a complete set of measurements and analysis.

In order to obtain the power quality data a **Network Analyser Equipment** is temporarily installed in the electrical lines of the installation where the disturbances appear. The equipment will continuously store the information regarding voltages and currents in the three phases of the line during the normal operation of the different industrial processes of the plant.

Thanks to the **analysis of the data**, the necessary information is obtained to offer the customer the most appropriate solution to alleviate the recorded network quality problems.


3. Installation and commissioning



In order to ensure that our system is correctly adapted to the customer's electrical installation, ZMS offers a **commissioning service** in all our lines of business: generation, industry, and transmission and distribution.

Our team of field engineers will have all the technical means required to carry out their functions, as well as human capital committed to quality and efficiency. In this way, we are able to offer, with **reliability and competence**, **advanced technical support** and a **competent after-sales service**.

4. Maintenance

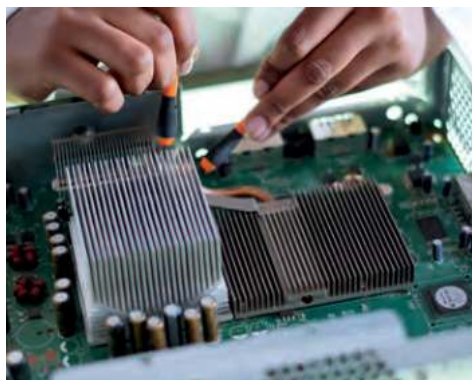

» 4.1. Preventive and predictive maintenance

Preventive interventions are essential to guarantee our customers greater safety and consolidate the conservation and good behaviour of the equipment. Correct and efficient maintenance will lead to a reduction in costs due to breakdowns and, in short, to a better quality of service.

We have different maintenance methods, adapted to the needs of the client. From a simple **systematic verification visit**, to total solutions that include **evaluation of functionality and performance**, prediction of possible future breakdowns, replacement of spare parts and periodic visits, taking into account at all times the **uninterrupted operation** of your systems.

We carry out maintenance analysis with specific indicators such as MTBF, MTTR, monitoring of spare parts consumption, failure rates, troubleshooting, etc., as well as operational analysis through event monitoring.



» 4.2. Corrective maintenance

At the end of the guarantee period, the commitment of our technical service remains a key factor and we offer customers **facilities** to optimise repairs.

Based on a telephone or web notification of the fault, a specialised technician will analyse the scope of the fault in order to make an initial diagnosis. In the first instance, we will try to solve the fault by telephone or via email. If a remote solution is not found, a repair process will be initiated depending on the size of the equipment.

- **Internal service:** the faulty equipment will be sent to our central factory.
- **Technical assistance:** a date will be planned with the customer that is convenient for both parties.

» 4.3. 24/365 Service

During working hours, ZMS has a **telephone service** to offer technical advice or to deal with any queries related to installations, software, breakdowns, etc.

We also have a 24 hour / 365 days a year **on-call service** with a maximum of 4 hours, which may be shorter or longer depending on the customer's needs.

5. Controlled waste recycling



» Our commitment to the environment:

- Preventing and eliminating pollution, guaranteeing adequate management of the waste produced in our activity.
- Recycle batteries of any composition (Pb, Ni Cd, Lithium Ion...).
- Comply with current environmental legislation and regulations, as well as with other requirements subscribed to voluntarily.
- Promote good environmental behaviour practices among our customers.

» Principles:

- Use raw materials and energy in a rational way.
- Integrate a culture of respect for the environment in all our company's design, development, production and after-sales service activities.
- To manage all waste according to criteria of minimisation at source, reuse and recycling.





always ON

Tu energía es nuestro reto



always ON



Zigor Corporación S.A.

Portal de Gamarra, 28
01013 Vitoria-Gasteiz
Álava-Araba
España
T +34 945 214 600

Zigor México S.A. de C.V

Pestalozzi, Ext 1029, Int 401
Colonia del Valle, 03100
México DF del Miguel Hidalgo
México
T 0052 5586470458

Zigor Energy SAS

Carrera 14 # 99-33 Oficina 406
Torre REM
Bogotá, Colombia
T +571 7953482
320-2370483
320-4545825

www.zigor.com

www.tuenergianuestroreto.com